


## Screwdriver Triton ESD slotted, 5 x 250 mm, 340 mm

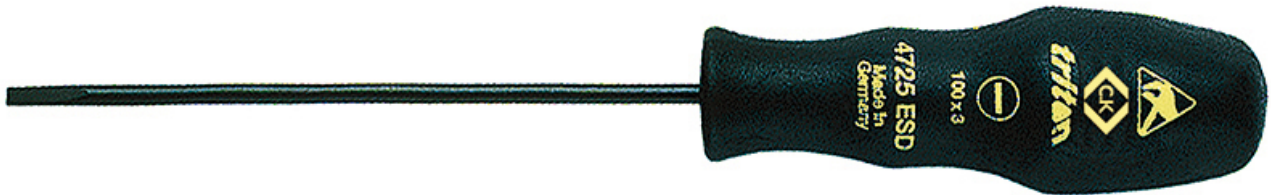

- Ergonomic triangular handle for comfort and increased torque
- Fully ESD-compliant, dissipative in all ranges
- Hardened alloy steel shaft for exceptional strength and durability
- Black blades, avoid reflections and flaking of chrome particles
- Direct injection moulding of the handle with the shaft guarantees long-lasting connection and function
- Precisely fitting tip for damage-free screwing in
- According to DIN ISO 2380, IEC61340 5.1 & 5.2
- Blade width: 5 mm
- Visible blade length: 250 mm
- total length: 340 mm

|                          |                     |
|--------------------------|---------------------|
| item number              | WL11052             |
| model                    | 4725ESD 250x5 mm    |
| manufacturer             | C.K                 |
| manufacturer item number | T4725ESD 10         |
| width                    | 29 mm               |
| height                   | 29 mm               |
| order unit               | 1 piece             |
| content unit             | 1 piece             |
| VDE                      | no                  |
| type of screw            | slot                |
| ESD safe                 | yes                 |
| packaging mass           | piece               |
| type of screwdriver      | normal screwdrivers |
| Blade thickness          | 0.8 mm              |
| tool length              | 340 mm              |

|                   |                |
|-------------------|----------------|
| usage screwdriver | slotted screws |
| blade length      | 250 mm         |
| blade width       | 5 mm           |

## Other versions

| item number | blade length | blade width & Blade thickness |
|-------------|--------------|-------------------------------|
| WL11053     | 75 mm        | 3 mm & 0.5 mm                 |
| WL11048     | 100 mm       | 3 mm & 0.5 mm                 |
| WL18088     | 100 mm       | 4 mm & 0.8 mm                 |
| WL11049     | 125 mm       | 5 mm & 0.8 mm                 |
| WL11052     | 250 mm       | 5 mm & 0.8 mm                 |