


Screwdriver Triton ESD slotted, 3 x 75 mm, 145 mm

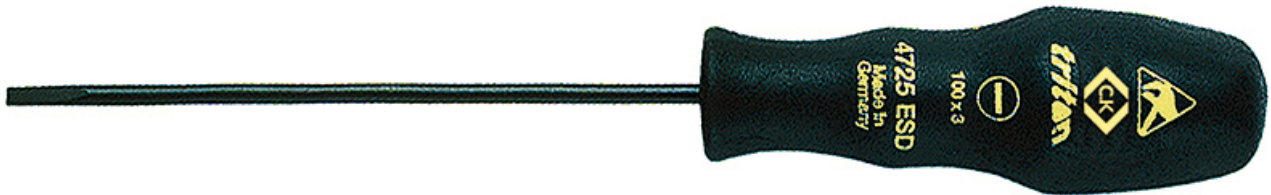

- Ergonomic triangular handle for comfort and increased torque
- Fully ESD compliant, dissipative in all ranges
- Hardened alloy steel shaft for exceptional strength and durability
- Black blades, avoid reflections and flaking of chrome particles
- Direct injection moulding of the handle with the shaft guarantees long-lasting connection and function
- Precisely fitting tip for damage-free screwing in
- According to DIN ISO 2380, IEC61340 5.1 & 5.2
- Blade width: 3 mm
- Visible blade length: 75 mm
- total length: 145 mm

item number	WL11053
model	4725ESD 75x3 mm
manufacturer	C.K
manufacturer item number	T4725ESD 03
width	23 mm
height	23 mm
order unit	1 piece
content unit	1 piece
VDE	no
type of screw	slot
ESD safe	yes
packaging mass	piece
type of screwdriver	normal screwdrivers
Blade thickness	0.5 mm
tool length	145 mm

usage screwdriver	slotted screws
blade length	75 mm
blade width	3 mm

Other versions

item number	blade length	blade width & Blade thickness
WL11053	75 mm	3 mm & 0.5 mm
WL11048	100 mm	3 mm & 0.5 mm
WL18088	100 mm	4 mm & 0.8 mm
WL11049	125 mm	5 mm & 0.8 mm
WL11052	250 mm	5 mm & 0.8 mm