


Extraction arm system DN50 3 joints, 765 mm, red - table mounting

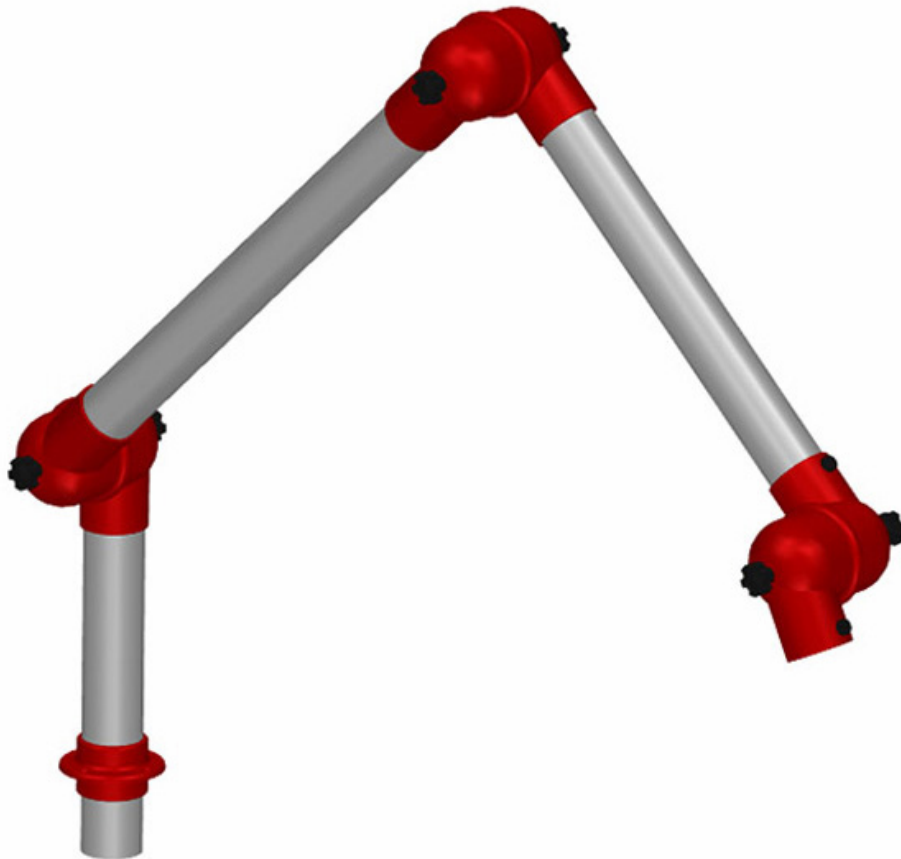

The Alsident 50 system has tubes with a diameter of 50 mm and is suitable for air volumes of 45 -85 m³/h. As a result, the system is ideally suited for use in industries with smaller detection tasks, such as the electronics industry, laboratories, laser technology or even for specialist rooms in schools.

- Maintenance-free O-rings Integrated throttle valve that is in open position from the air stream to ensure maximum flow rate
- Threaded rods, springs and thumbscrews in acid-resistant stainless steel (AISI 316L)
- Acid-resistant POP® rivets for increased durability even when used in aggressive environments
- Protective grille (accessory) to prevent foreign bodies from being sucked in
- All components RoHS compliant

item number	WL15473
model	50-3727-1-4
manufacturer	ALSIDENT
manufacturer item number	50-3727-1-4
order unit	1 piece
content unit	1 piece
colour	red
Colour	red
material	Anodised aluminium tubes - layer thickness 10 µ, polypropylene joints
product series	Alsident System 50 AL
number of joints	3
range	765 mm
diameter of tube	50 mm
air volume extraction arm	45 – 85 m ³ /h
assembling	table mounting
joint colour	red
device series	WSA-10LR, WSA-20LR, WSA-5LR
ESD safe	no