


ESD extraction arm system DN50 3 joints, 765 mm, black - table mounting

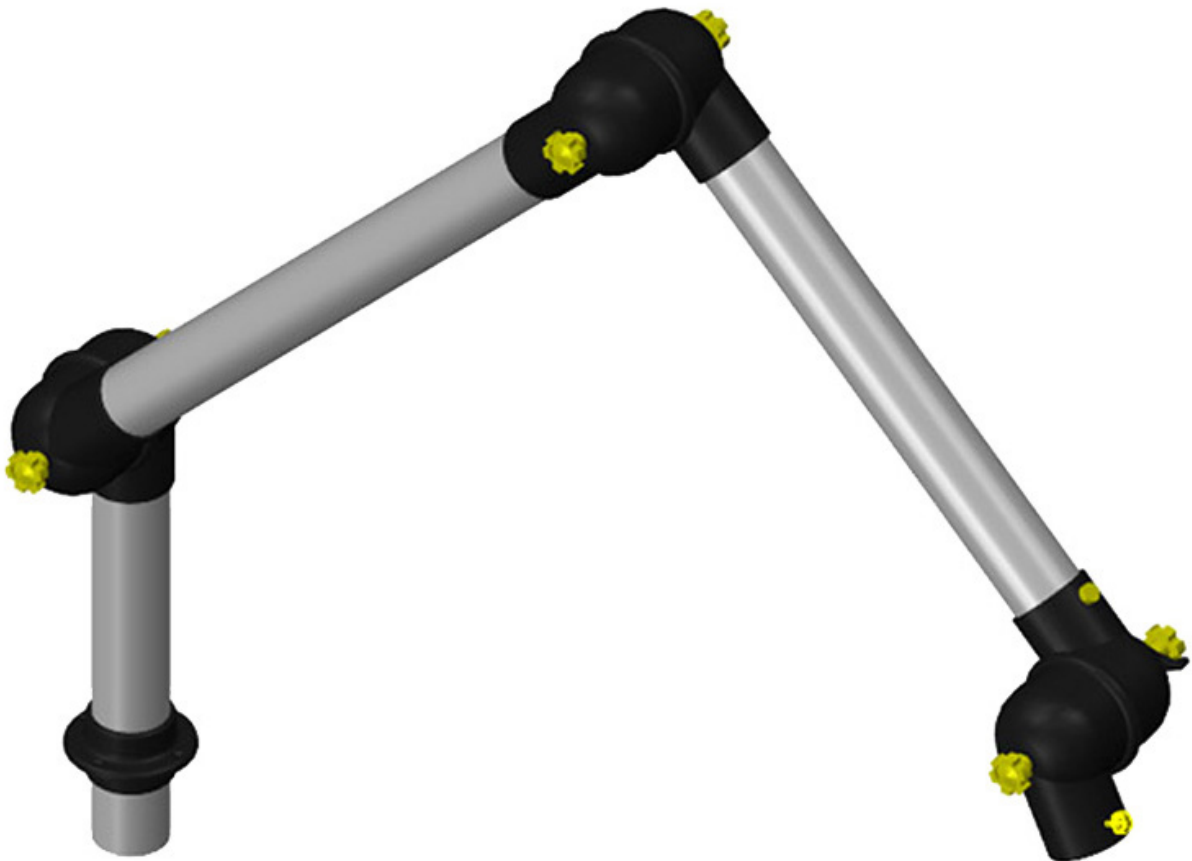

The Alsident 50 system has tubes with a diameter of 50 mm and is suitable for air volumes of 45 -85 m³/h. As a result, the system is ideally suited for use in industries with smaller detection tasks, such as the electronics industry, laboratories, laser technology or even for specialist rooms in schools. The ESD-compliant extraction arm naturally complies with DIN EN 61340-5-1 and is earthed with 1M Ω resistor.

- Maintenance-free, conductive O-rings
- Integrated throttle valve which is in open position from the air flow to ensure maximum flow through the unit
- Threaded rods, springs and thumbscrews in acid-resistant stainless steel (AISI 316L)
- Protective grille (accessory) to prevent foreign bodies from being sucked in
- Tested for use in ESD areas according to IEC 61340-5-1:2016
- The earthing cable has a 1 M Ω safety resistor
- all components RoHS compliant

item number	WL15474
model	50-3727-1-6
manufacturer	ALSIDENT
manufacturer item number	50-3727-1-6
order unit	1 piece
content unit	1 piece
colour	black
Colour	black
material	Tubes in chromated TCP aluminium, joints in conductive polypropylene
product series	Alsident System 50 AS
number of joints	3
range	765 mm
diameter of tube	50 mm
air volume extraction arm	45 – 85 m ³ /h
assembling	table mounting
joint colour	black
device series	WSA-10LR, WSA-20LR, WSA-5LR
ESD safe	yes