


ESD extraction arm system DN50 for table mounting, 3 joints, black, 945 mm

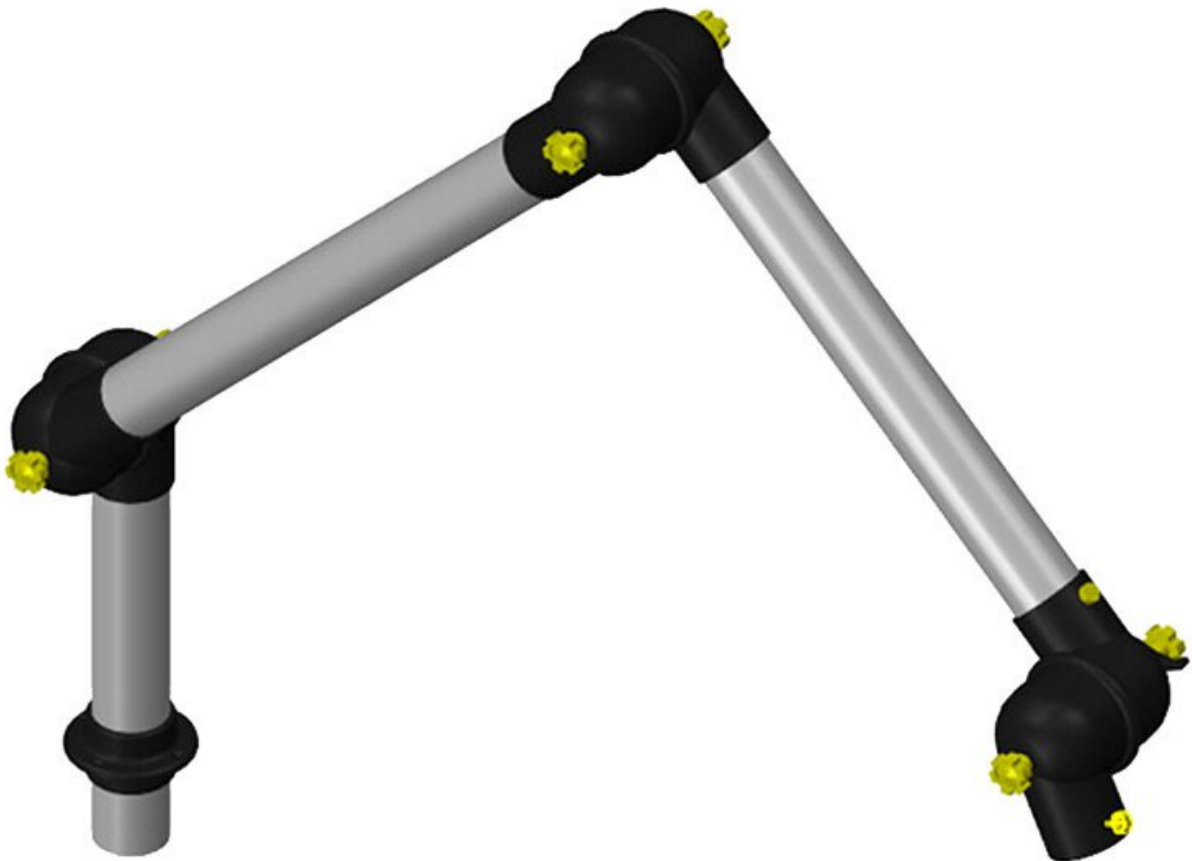

The Alsident 50 system has tubes with a diameter of 50 mm and is suitable for air volumes of 45 -85 m³/h. As a result, the system is ideally suited for use in industries with smaller detection tasks, such as the electronics industry, laboratories, laser technology or even for specialist rooms in schools. The ESD-compliant extraction arm naturally complies with DIN EN 61340-5-1 and is earthed with 1M Ω resistor.

- Maintenance-free, conductive O-rings
- Integrated throttle valve which is in open position from the air flow to ensure maximum flow through the unit
- Threaded rods, springs and thumbscrews in acid-resistant stainless steel (AISI 316L)
- Protective grille (accessory) to prevent foreign bodies from being sucked in
- Tested for use in ESD areas according to IEC 61340-5-1:2016
- The earthing cable has a 1 M Ω safety resistor
- all components RoHS compliant

Article no.	WL15479
Model	50-4737-1-6
Manufacturer	ALSIDENT
Manufacturer article no.	50-4737-1-6
GPSR manufacturer data	Alsident system A/S Finlandsvej 10 DK-8450 Hammel www.alsident.com
Sales unit	1 piece
Content unit	1 piece
Colour	black
Colour	black
Material	Tubes in chromated TCP aluminium, joints in conductive polypropylene
Product series	Alsident System 50 AS
Number of joints	3
Reach	945 mm
Pipe diameter	50 mm
Air volume of the extraction arm	45 – 85 m ³ /h
Mounting type	table mounting
Joint colour	black
Device series	WSA-10LR, WSA-20LR, WSA-5LR
ESD compliant	yes

Other versions

Article no.	Reach
WL15474	765 mm
WL15479	945 mm
WL19629	1125 mm