


## Suction arm system DN50 for table mounting, 3 joints, red, 1125 mm

---

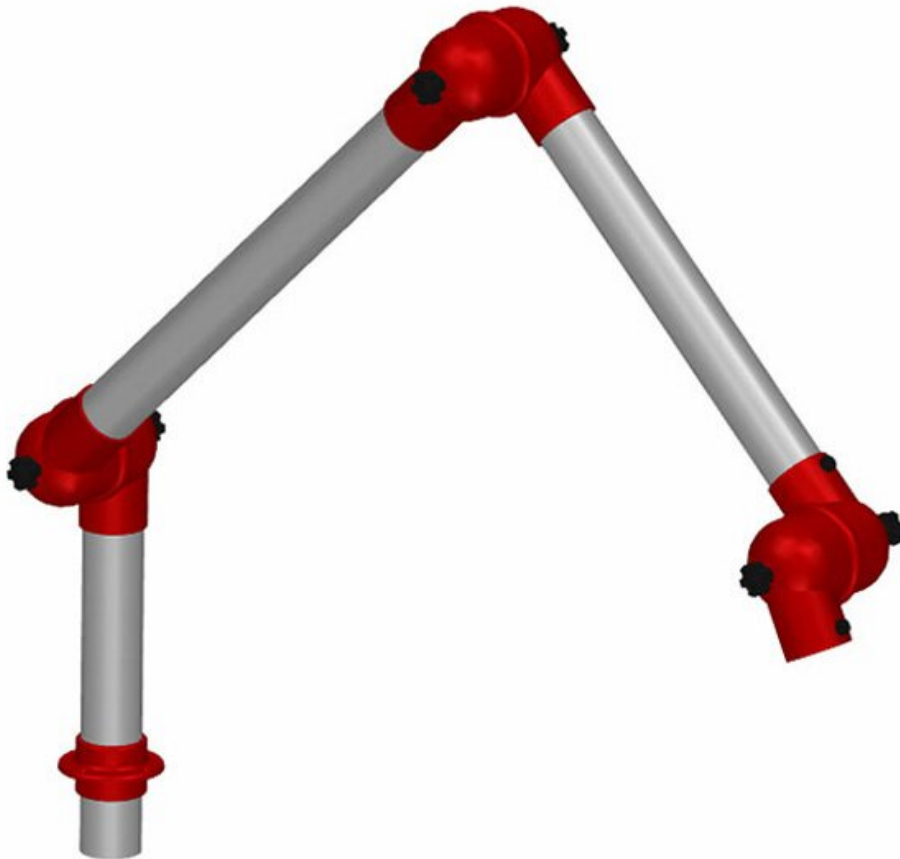

The Alsident 50 system has tubes with a diameter of 50 mm and is suitable for air volumes of 45 -85 m<sup>3</sup>/h. As a result, the system is ideally suited for use in industries with smaller detection tasks, such as the electronics industry, laboratories, laser technology or even for specialist rooms in schools.

- Maintenance-free O-rings
- Integrated throttle valve that is in open position from the air stream to ensure maximum flow rate
- Threaded rods, springs and thumbscrews in acid-resistant stainless steel (AISI 316L)
- Acid-resistant POP® rivets for increased durability even when used in aggressive environments
- Protective grille (accessory) to prevent foreign bodies from being sucked in
- All components RoHS compliant

<b>Article no.</b>	<b>WL15481</b>
Model	50-5747-1-4
Manufacturer	ALSIDENT
Manufacturer article no.	50-5747-1-4
GPSR manufacturer data	Alsident system A/S Finlandsvej 10 DK-8450 Hammel www.alsident.com
Sales unit	1 piece
Content unit	1 piece
Colour	red
Colour	red
Material	Anodised aluminium tubes - layer thickness 10 µ, polypropylene joints
Product series	Alsident System 50 AL
Number of joints	3
Reach	1125 mm
Pipe diameter	50 mm
Air volume of the extraction arm	45 – 85 m <sup>3</sup> /h
Mounting type	table mounting
Joint colour	red
Device series	WSA-10LR, WSA-20LR, WSA-5LR
ESD compliant	no

## Other versions

<b>Article no.</b>	<b>Reach</b>
WL15473	765 mm
<b>WL15481</b>	<b>1125 mm</b>
WL20564	1425 mm