


ESD side cutters, RX series, oval jaws, fine bevel, 0.1-1.25 mm

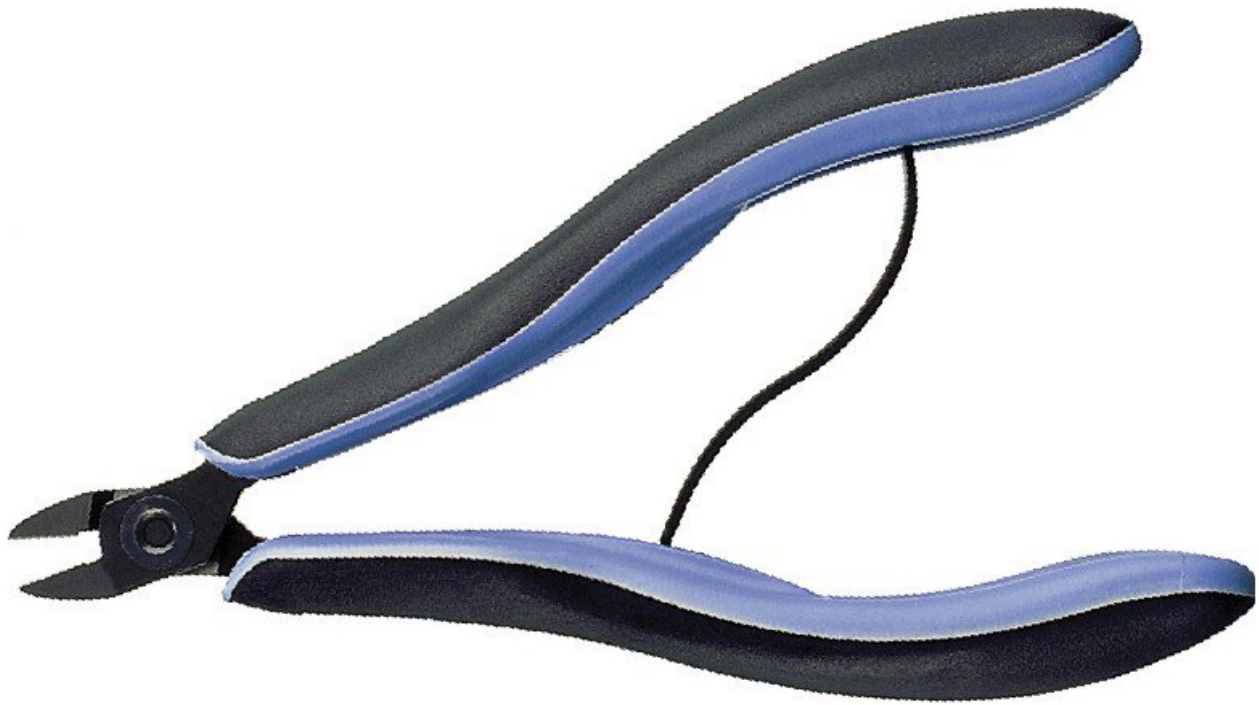

Made of high-performance ball bearing steel, burnished. Cutting and jaws computer-ground, thus highest precision and constant quality. Induction hardening of the cutting edges to 63-65 HRC. Handles of 2 components, with opening spring. cutting capacity: copper wire

Side cutters with oval head, e.g. for work on cable harnesses and for assembly work on printed circuit boards.

- cutting capacity copper D = 0.1-1.25 mm

Item no.	WL16001
Model	RX 8141
Manufacturer	LINDSTRÖM
Manufacturer article no.	RX 8141
GPSR manufacturer data	SNA Europe SAS/ LINDSTRÖM Antigua Carretera Altube km 5.5 ES-01006 Vitoria-Gasteiz www.lindstromtools.com

Length	135.5 mm
Width	123 mm
Height	85 mm
Sales unit	1 piece
Content unit	1 piece
Incl. battery	no
Product series	RX Series
VDE	no
Head width	10 mm
Cut shape	small bevel
ESD compliant	yes
Side cutter cutting capacity	0,1 - 1,25 mm
Jaw shape	oval
Tool length	135.5 mm
Type of side cutters	side cutter
Length of the jaws	10.5 mm

Other versions

Item no.	Side cutter cutting capacity	Cut shape	Jaw shape
WL70875	0,1 - 0,8 mm	small bevel	pointed
WL70874	0,1 - 0,8 mm	with bevel	pointed
WL15995	0,1 - 0,8 mm	without bevel	oval
WL52716	0,1 - 0,8 mm	without bevel	pointed
WL16015	0,1 - 0,8 mm	without bevel	sharpened to a point
WL15993	0,1 - 1 mm	small bevel	oval
WL16013	0,1 - 1 mm	small bevel	sharpened to a point
WL16003	0,1 - 1 mm	without bevel	oval
WL16009	0,1 - 1 mm	without bevel	pointed
WL16001	0,1 - 1,25 mm	small bevel	oval
WL16007	0,1 - 1,25 mm	small bevel	pointed
WL15991	0,2 - 1 mm	large bevel	oval
WL16011	0,2 - 1 mm	large bevel	sharpened to a point
WL16022	0,2 - 1,6 mm	small bevel	oval

WL15999	0,2 - 1,25 mm	large bevel	oval
WL16005	0,2 - 1,25 mm	large bevel	pointed
WL70877	0,2 - 1,25 mm	small bevel	pointed
WL16024	0,2 - 1,25 mm	without bevel	oval
WL70879	0,3 - 1,5 mm	small bevel	pointed
WL16019	0,3 - 1,6 mm	large bevel	oval
WL18748	0,3 - 1,6 mm	without bevel	oval
WL70876	0,3 - 1,25 mm	with bevel	pointed
WL70880	0,3 - 1,25 mm	without bevel	pointed
WL18747	0,3 - 2 mm	small bevel	oval
WL70878	0,4 - 1,5 mm	with bevel	pointed
WL18746	0,4 - 2 mm	large bevel	oval

