


## ESD extraction arm system DN50 for table mounting, 3 joints, black, 1125 mm

---

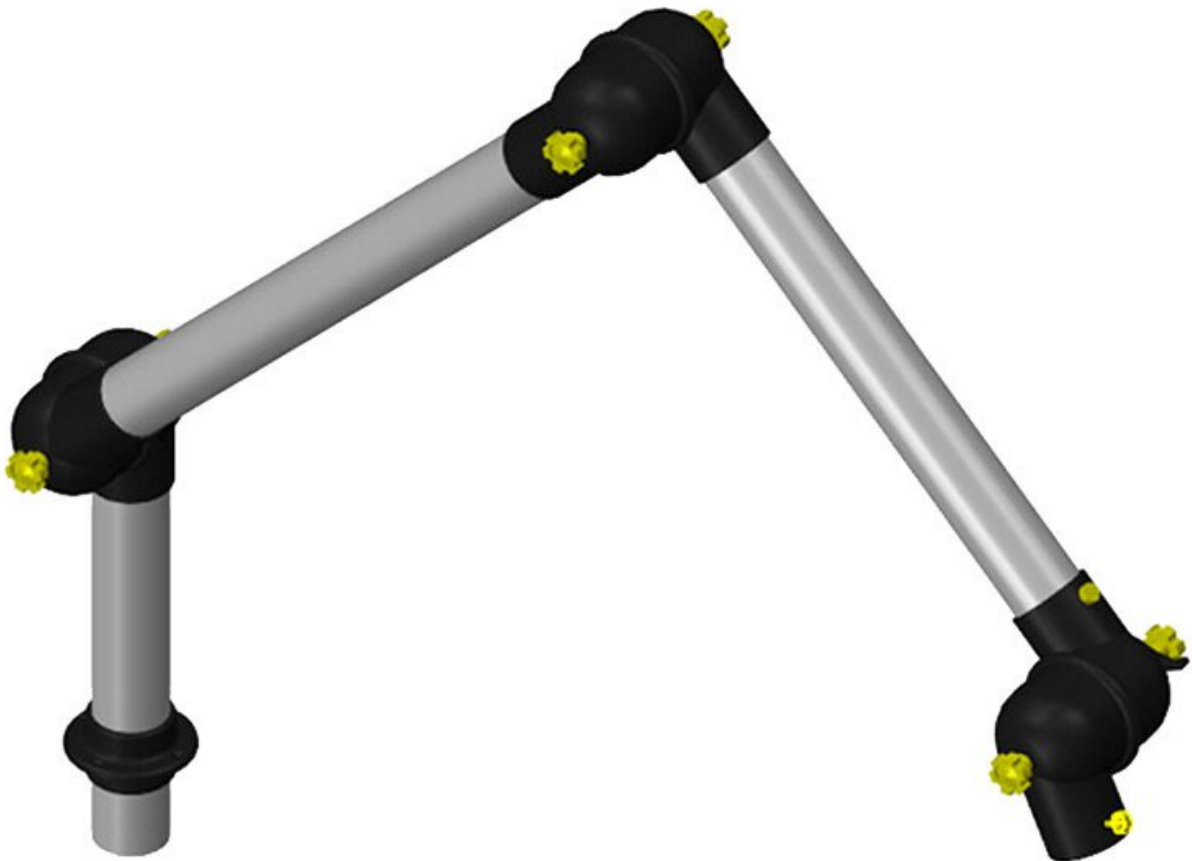

The Alsident 50 system has tubes with a diameter of 50 mm and is suitable for air volumes of 45 -85 m<sup>3</sup>/h. As a result, the system is ideally suited for use in industries with smaller detection tasks, such as the electronics industry, laboratories, laser technology or even for specialist rooms in schools. The ESD-compliant extraction arm naturally complies with DIN EN 61340-5-1 and is earthed with 1M $\Omega$  resistor.

- Maintenance-free, conductive O-rings
- Integrated throttle valve which is in open position from the air flow to ensure maximum flow through the unit
- Threaded rods, springs and thumbscrews in acid-resistant stainless steel (AISI 316L)
- Protective grille (accessory) to prevent foreign bodies from being sucked in
- Tested for use in ESD areas according to IEC 61340-5-1:2016
- The earthing cable has a 1 M $\Omega$  safety resistor
- all components RoHS compliant

<b>item number</b>	<b>WL19629</b>
model	50-5747-1-6
manufacturer	ALSIDENT
manufacturer item number	50-5747-1-6
GPSR manufacturer information	Alsident system A/S Finlandsvej 10 DK-8450 Hammel www.alsident.com
order unit	1 piece
content unit	1 piece
colour	black
Colour	black
material	Tubes in chromated TCP aluminium, joints in conductive polypropylene
product series	Alsident System 50 AS
number of joints	3
range	1125 mm
diameter of tube	50 mm
air volume extraction arm	45 – 85 m <sup>3</sup> /h
assembling	table mounting
joint colour	black
device series	WSA-10LR, WSA-20LR, WSA-5LR
ESD safe	yes

## Other versions

<b>item number</b>	<b>range</b>
WL15474	765 mm
WL15479	945 mm
<b>WL19629</b>	<b>1125 mm</b>