
Suction arm system DN75 for table mounting, 3 joints, red, 550 mm

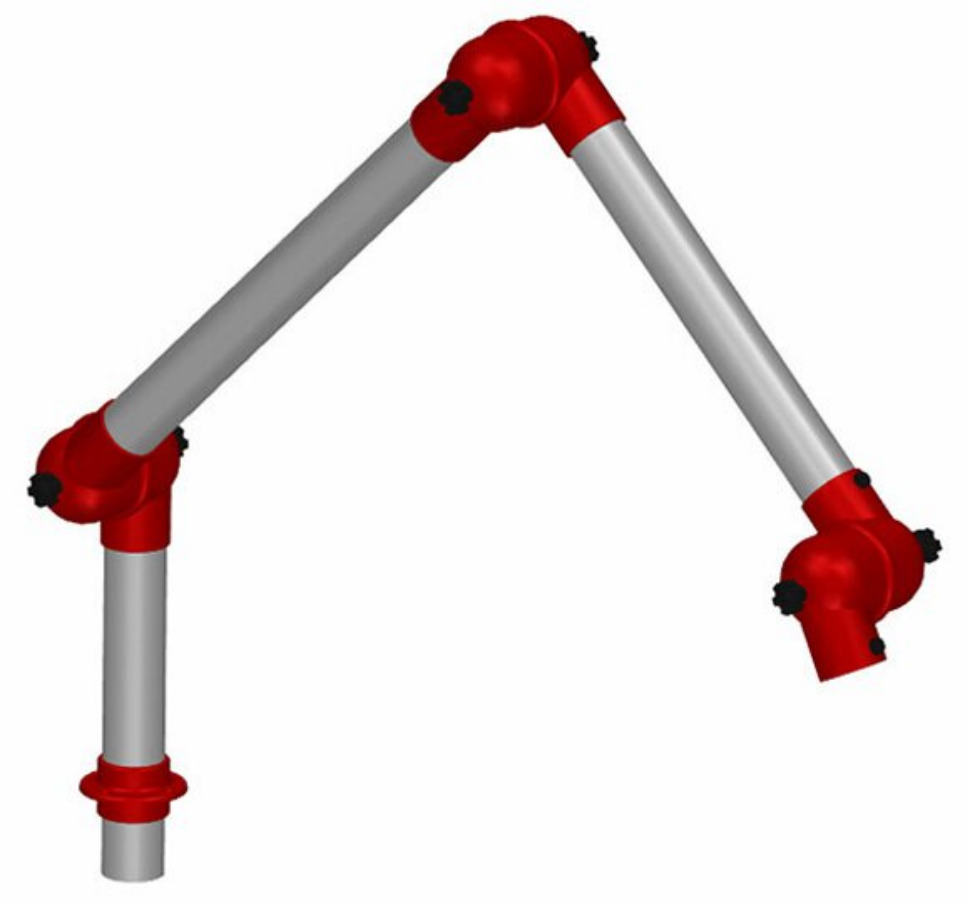

Alsident's DN75 system can be used in a wide range of applications, including laboratories, laser technology, chemical and pharmaceutical industries, as well as school classrooms. The tubes have a diameter of 75 mm and the recommended air volume is 80 m^3/h to 180 m^3/h.

- Maintenance-free O-rings
- Integrated throttle valve which is in open position from the air flow to ensure maximum flow through the unit
- Threaded rods, springs and thumbscrews in acid-resistant stainless steel (AISI 316L)
- Acid-resistant POP® rivets for increased durability even when used in aggressive environments
- Protective grille (accessory) to prevent foreign bodies from being sucked in
- All components RoHS compliant

Item no.	WL20358
Model	75-3535-1-4
Manufacturer	ALSIDENT
Manufacturer article no.	75-3535-1-4
GPSR manufacturer data	Alsident system A/S Finlandsvej 10 DK-8450 Hammel www.alsident.com
Sales unit	1 piece
Content unit	1 piece
Colour	red
Material	Anodised aluminium tubes - layer thickness 10µ, joints made of impact-resistant, chemically resistant polypropylene (PP)
Product series	Alsident System 75 AL
Number of joints	3
Reach	550 mm
Pipe diameter	75 mm
Air volume of the extraction arm	80 – 180 m^3/h
Mounting type	table mounting
Joint colour	red
ESD compliant	no

Other versions

Item no.	Reach
WL20358	**550 mm**
WL19384	900 mm
WL44231	1290 mm