


Metal PCB magazine 603.3 Metal, 380 x 400 x 563 mm

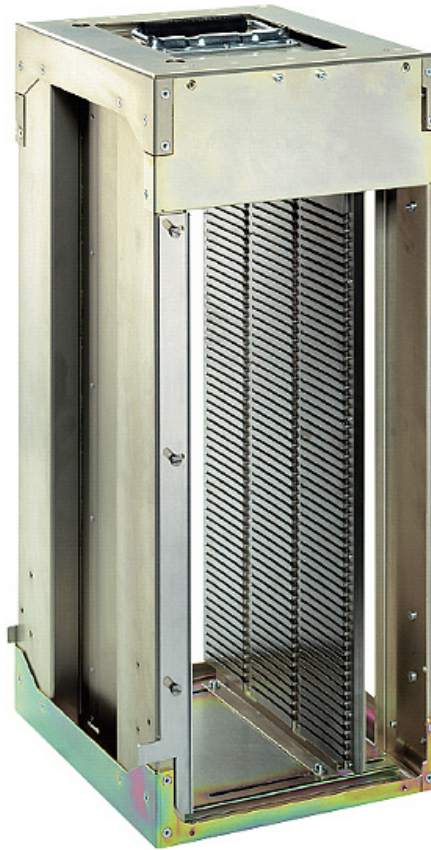

Screw terminals

The 600 series is a cost-effective variant. By loosening the four screw clamps, the web can be adjusted to the required PCB width.

Transport lock

A latch is mounted on the front and rear as standard. When lifted, the latch is moved outwards and locks in the upper position. The PCBs can be inserted or removed. When lifted again, the guides are locked.

- for high mechanical + thermal stress
- slot depth 3 mm, with transport lock
- LP: W = 10-310 mm (adjustable), L max = 387 mm
- Magazine: H x W x D = 563 x 380 x 400 mm
- Bar wall metal
- width adjustment by screw clamping
- stackable or for reversible operation
- Temperature: shelves 200 °C, environment 200 °C

Products for the electronic industry



item number	WL23098
model	8915603
manufacturer	CAB
manufacturer item number	8915603
order unit	1 piece
content unit	1 piece
temperature max.	200 °C
ESD safe	no
Series PCB magazines	Series 600
Material PCB magazine	metal