


ESD air cushion bag shielding with flap 200 x 250 mm

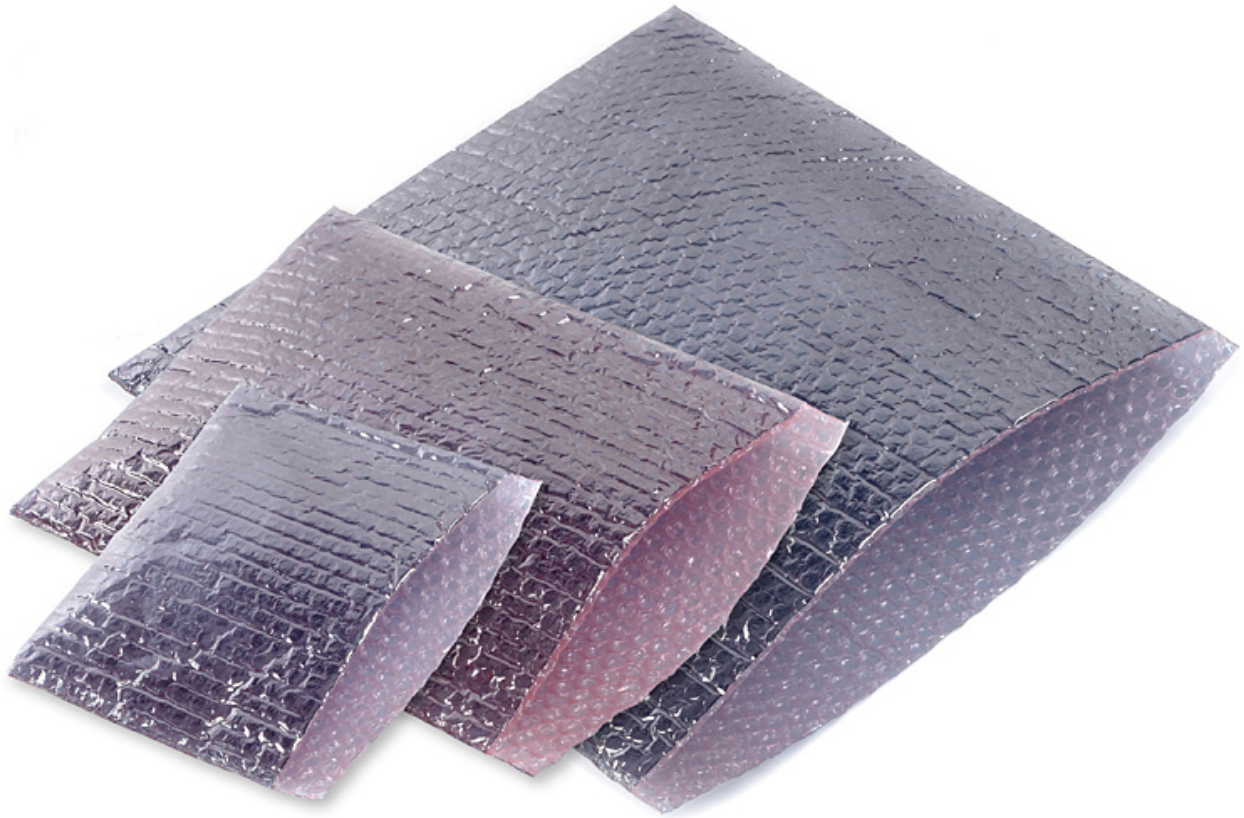

SafeGuard's shielding air bubble bag has a 30 mm flap and offers electrostatic and mechanical protection for sensitive components. Of course, it meets the requirements of DIN EN 61340-5-1.

- Surface resistance: $R_{pp} < 1 \times 10^{11} \Omega$
- ESD-STM 11.11 @12% HR
- Discharge time: $< 0.05 \text{ sec.}$ FTMS 101 Mtd 406
- Shielding effect: $< 50 \text{ nJ}$
- material: shielding foil + PE air cushion
- Damper dimensions: 30 mm
- for electrostatic and mechanical protection

item number

WL24832

model

SG-LPT-GR-ABS-148

manufacturer

SAFEGUARD

Products for the electronic industry



manufacturer item number	SG-LPT-GR-ABS-148-250X200
length	250 mm
width	200 mm
order unit	1 piece
content unit	1 piece
colour	grey
Colour	grey
film thickness	148 µm
property packaging	shielding
ESD safe	yes

Other versions

item number	length x width
WL24830	150 mm x 100 mm
WL24831	200 mm x 150 mm
WL24833	210 mm x 240 mm
WL24832	250 mm x 200 mm
WL24834	300 mm x 250 mm
WL24836	300 mm x 345 mm
WL24835	375 mm x 300 mm
WL24837	460 mm x 460 mm