


ESD bubble wrap, pink conductive, width 600 mm, 150 m roll

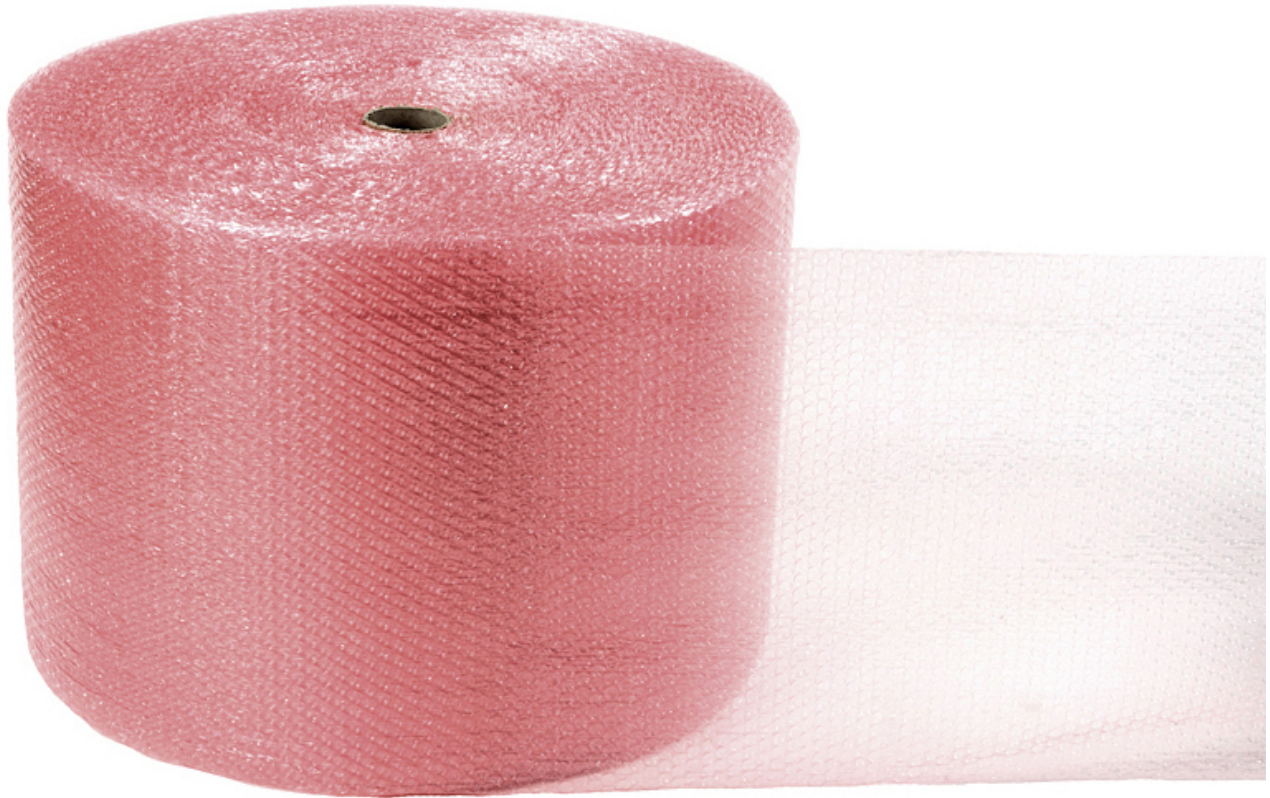

The conductive ESD bubble wrap from SafeGuard is 2-ply and can be welded together. The knob diameter is 10 mm and of course meets the requirements of DIN EN 610340-5-1.

- Surface resistance: $R_{pp} < 1 \times 10^{11} \Omega$
- properties: Conductive LDPE
- stud diameter: 10mm
- 2-ply
- weldable, recyclable, amine-free
- complies with DIN EN 61340 and ROHS directive

item number	WL24846
model	SG-LPT-ROSA-ABL-55
manufacturer	SAFEGUARD
manufacturer item number	SG-LPT-ROSA-ABL-55-150X600
length	150000 mm

width	600 mm
order unit	1 rolls
content unit	1 rolls
colour	pink
Colour	rose
film thickness	55µm +/- 10 %
property packaging	dissipative
ESD safe	yes

Other versions

item number	width
WL24844	300 mm
WL24845	500 mm
WL24846	600 mm

