


Crimping pliers, painted black, with multi-component grips, 240 mm

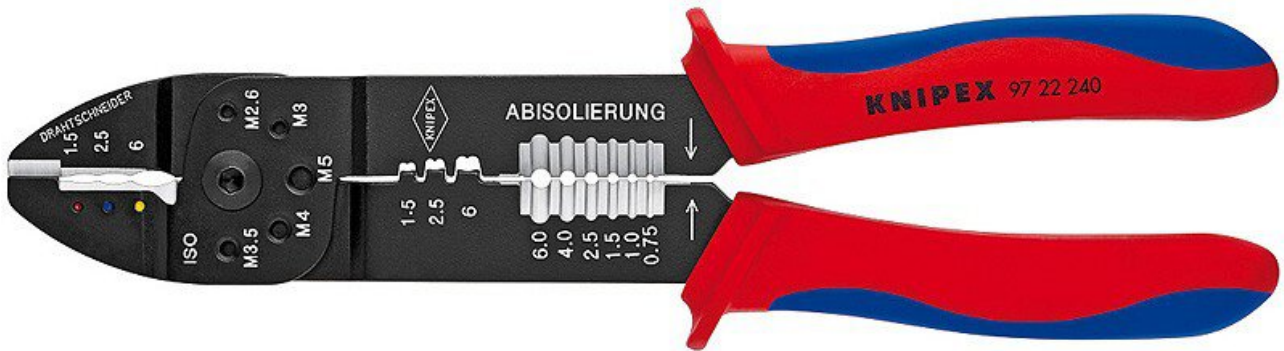

For cable cutting, wire stripping and crimping of insulated and uninsulated cable lugs and connectors and open connectors. With threaded holes for cutting Cu or Ms threaded pins with M 2.6; M 3; M 3.5; M 4 and M 5. Screwed joint for high stability and smooth running. - Application: insulated cable lugs + cable connectors uninsulated, open connectors (6.3 mm plug width) - Capacity square millimetres: 0.5 - 6.0mm² - Number of nests: 3 - AWG: 20 - 10

- For cutting cables, stripping wires and crimping insulated and uninsulated cable lugs and connectors and open connectors
- With threaded holes for cutting copper or brass threaded pins with M 2.6
- M 3
- M 3,5
- M 4 and M 5
- Screwed joint for high stability and smooth running

Item no.	WL27020
Model	97 22 240
Manufacturer	KNIPEX
Manufacturer article no.	97 22 240
GPSR manufacturer data	KNIPEX-Werk Oberkamper Strasse 13 DE-42349 Wuppertal-Cronenberg www.knipex.de
Length	240 mm
Width	62 mm
Height	25 mm

Products for the electronic industry



Length with packaging	254 mm
Width with packaging	116 mm
Height with packaging	92 mm
Volume with packaging	2.711 dm ³
Sales unit	1 piece
Content unit	1 piece
Type of packaging	single pack
Incl. battery	no
RoHS compliant	no
Surface	black lacquered
VDE	no
Crimping application	insulated cable lugs + cable connectors;uninsulated, open connectors (6.3 mm plug width)
Number of crimp nests	3
ESD compliant	no
AWG	20 - 10
Crimp profile	F-crimp, Oval crimp
Tool length	240 mm
Grip (expression)	with multi-component sleeves
Type of pliers	automatic crimping tool