


Crimping pliers, painted black, with multi-component grips, 240 mm

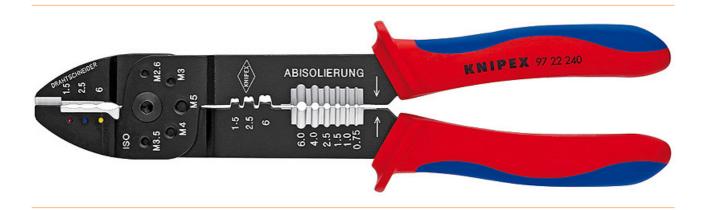

For cable cutting, wire stripping and crimping of insulated and uninsulated cable lugs and connectors and open connectors. With threaded holes for cutting Cu or Ms threaded pins with M 2.6; M 3; M 3.5; M 4 and M 5. Screwed joint for high stability and smooth running. - Application: insulated cable lugs + cable connectorsuninsulated, open connectors (6.3 mm plug width) - Capacity square millimetres: 0.5 - 6.0mm² - Number of nests: 3 - AWG: 20 - 10 • For cutting cables, stripping wires and crimping insulated and uninsulated cable lugs and connectors and open connectors

- With threaded holes for cutting copper or brass threaded pins with M 2.6
- M 3
- M 3,5
- M 4 and M 5
- · Screwed joint for high stability and smooth running

| item number | WL27020 |
|--------------------------|-----------|
| model | 97 22 240 |
| manufacturer | KNIPEX |
| manufacturer item number | 97 22 240 |
| length | 240 mm |
| width | 62 mm |
| height | 25 mm |
| length with packaging | 254 mm |
| width with packaging | 116 mm |
| height with packaging | 92 mm |

Products for the electronic industry













| Packaging volume | 2.711 dm ³ |
|-----------------------|--|
| order unit | 1 piece |
| content unit | 1 piece |
| type of packaging | single pack |
| RoHS conform | no |
| surface | black lacquered |
| VDE | no |
| application crimp | insulated cable lugs + cable connectors;uninsulated, open connectors (6.3 mm plug width) |
| Number of crimp nests | 3 |
| crimp profile | Oval crimp;F crimp |
| tool length | 240 mm |
| AWG | 20 - 10 |
| type of handle | with multi-component sleeves |
| type of pliers | automatic crimping tool |









2/2