


Universal key TwinKey, for common cabinets and shut-off system

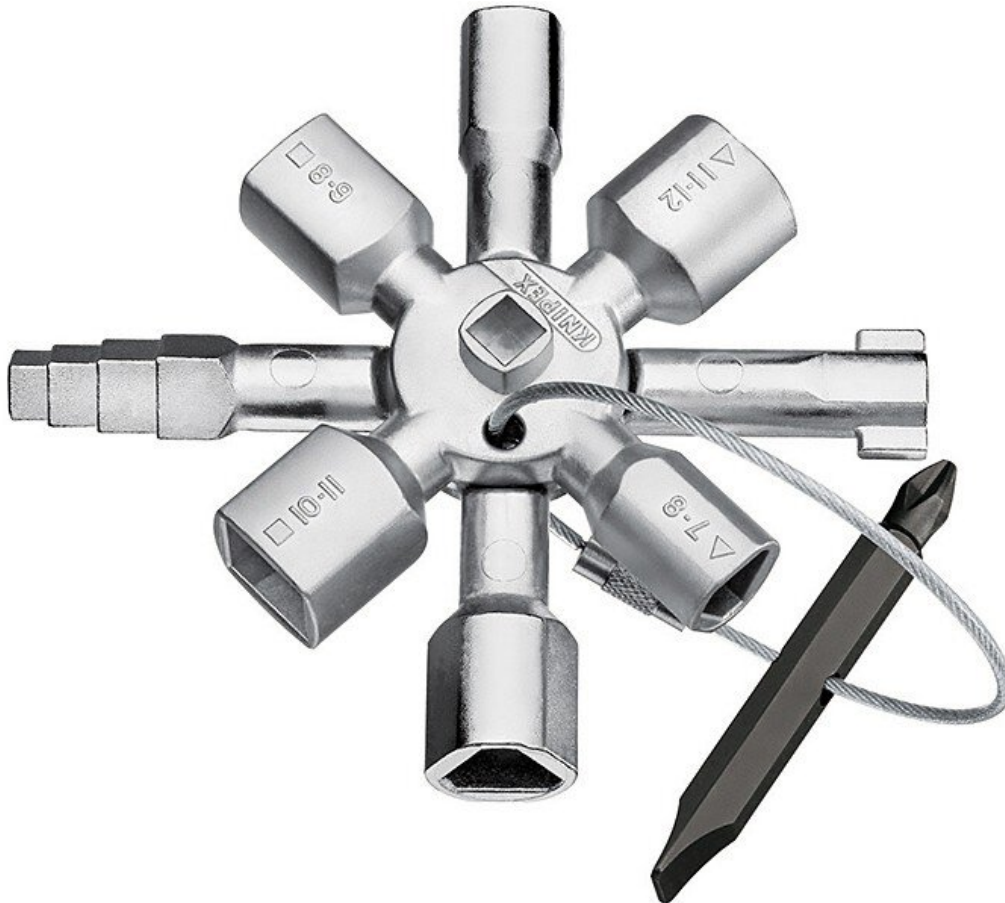

KNIPEX TwinKey® 10 profiles. 2 crosses. 1 key... All common locking systems... Multifunctional key for operating locks in the fields of building services (heating and sanitary, air conditioning and ventilation, electrical engineering), gas and water supply and shut-off systems. 8-row version: 2 cross keys connected by means of magnets to save space. Reversible bit: slot 1.0 x 7 mm and cross recess PH2. Wrench and reversible bit connected by sturdy stainless steel wire rope. Weight-optimized zinc die-cast construction.

- Capacity square: 5,0 / 6,0 - 7,0 / 8,0 - 9,0 / 10,0 - 11,0mm - Capacity double bit: 3 - 5mm - Capacity half bit: 6mm - Capacity triangular: 7,0 - 8,0 / 9,0 - 10,0 / 11,0 - 12,0mm
- Multifunctional key for operating locks in the fields of building services (heating and sanitary, air conditioning and ventilation, electrical), gas and water supply and shut-off systems.
- 8-row version: 2 cross keys connected by means of magnets to save space
- Reversible bit: slot 1.0 x 7 mm and cross recess PH2

- Key and reversible bit connected by stable stainless steel wire rope
- Weight-optimized zinc die-cast construction

Item no.	WL27686
Model	00 11 01
Manufacturer	KNIPEX
Manufacturer article no.	00 11 01
GPSR manufacturer data	KNIPEX-Werk Oberkamper Strasse 13 DE-42349 Wuppertal-Cronenberg www.knipex.de
Length	95 mm
Width	85 mm
Height	23 mm
Length with packaging	95 mm
Width with packaging	85 mm
Height with packaging	23 mm
Volume with packaging	0.6 dm ³
Sales unit	1 piece
Content unit	1 piece
Type of packaging	single pack
RoHS compliant	no
VDE	no