
Soldering tip, straight, bevelled, 17.0 mm, 0832LDLF

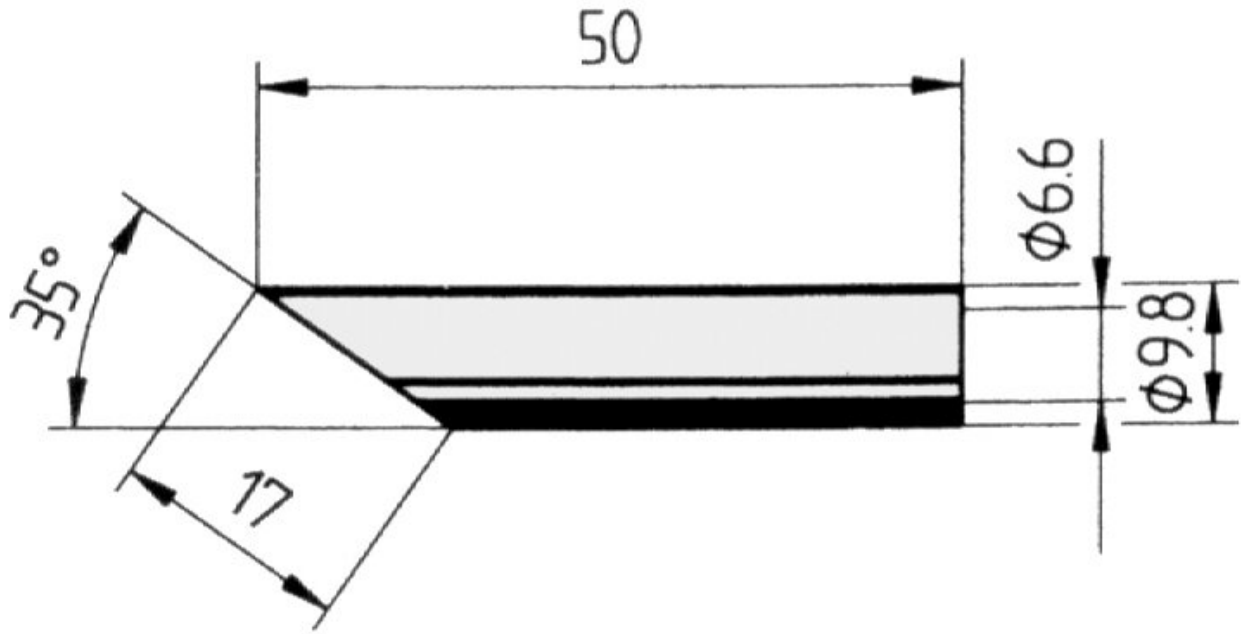

• Continuous soldering tip, straight, beveled 35° angle, 17.0 mm wide, with ERSADUR-LF coating (lead-free soldering) for increased service life.
• suitable for soldering stations ANANLOG60, ANALOG60A, DIGITAL80, DIGITAL80A, DIGITAL2000A, RDS80, MICRO-CON60, TWIN80A, ELS8000/M/D, MS6000 as well as MS8000

Item no.	**WL36110**
Model	832LD-LF
Manufacturer	ERSA
Manufacturer article no.	0832LDLF/SB
GPSR manufacturer data	ERSA GmbH Leonhard-Karl-Strasse 24 DE-97877 Wertheim www.ersa.de
Length	50 mm
Length with packaging	90 mm
Width with packaging	60 mm
Height with packaging	10 mm

Sales unit	1 piece
Content unit	1 piece
Total length	50 mm
Product series	832
RoHS compliant	yes
Tip series	832
Inner diameter (shaft)	6.6 mm
Outer diameter (shaft)	9.8 mm
Soldering tip diameter	17 mm
Tip shape	tapered
Tip alignment	straight
Coating of the soldering tip	permanent soldering tip
Matching handpiece	BASIC TOOL, ERGO TOOL, MULTI-PRO, MULTI-SPRINT, MULTI-TC, POWER-TOOL, PTC 70
ESD compliant	no