


Soldering head for automated soldering processes

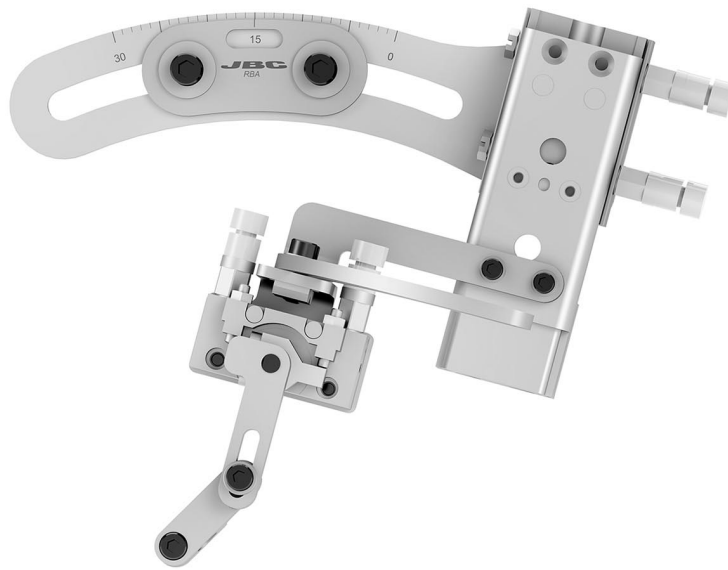

- designed for use in automated soldering processes and for holding JBC components such as the Solder Feeder SFT with Guide Kit GSFR and the TR soldering iron
- can also be combined with fume extraction and a camera for monitoring the soldering process
- allows two independent automatic movements by pneumatic actions:
 - Movement of the lifting unit: integrated pneumatic lifting unit enables fast Z-axis movement to and from the soldering position. The lifting unit has a spring-loaded buffer stroke of 5 mm to reduce the risk of collisions
 - Nozzle actuator movement: Nozzle control allows the dispensing tube to be moved up to 90° in and out of the feed position to facilitate tip cleaning with the CLMR tip cleaner

item number

WL42700

model

RBA-A

Products for the electronic industry



manufacturer	JBC
manufacturer item number	RBA-A
order unit	1 piece
content unit	1 piece

