


ESD table cover Premium, light blue 600 x 10000 x 2 mm, roll material

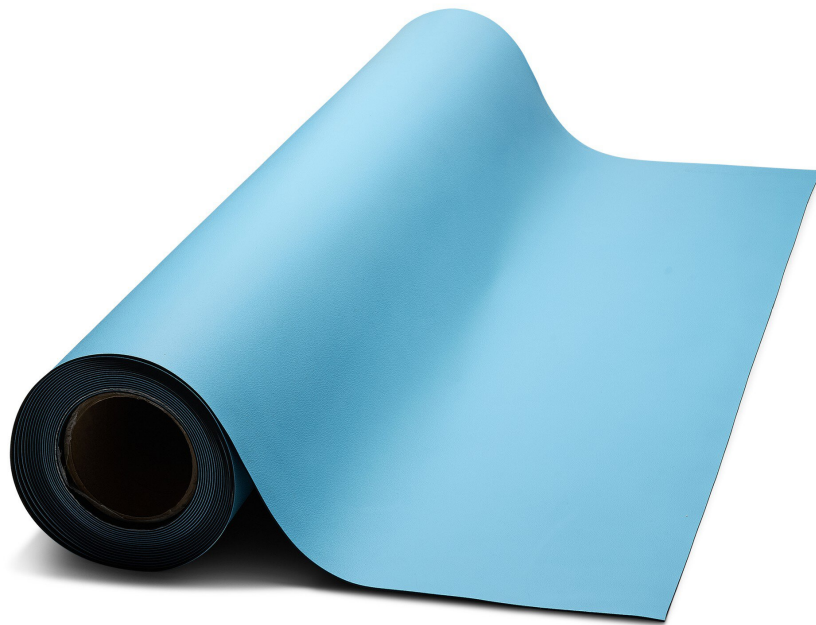

The SafeGuard ESD table covering in light blue is the ideal solution for your electronics production. Measuring 600 x 10000 x 2 mm, the roll product offers a heat- and solder-resistant surface that can also be used as a soldering mat. It is temperature-resistant up to 750°C in accordance with the glow wire test to IEC 60335-1:2010 and the needle flame test to IEC 60695-11 for up to 30 seconds. The chemical and oil resistance ensure a long service life, while the permanently elastic nature prevents the ESD table mat from rolling up. RoHS-compliant and equipped with a two-layer ESD structure (dissipative/conductive), the surface resistance is between 10^6 and 10^7 ohms in accordance with EN 61340-2-3. The anti-reflective surface makes working even easier.

- Heat and solder resistant
- Temperature resistant according to Glow wire test - IEC 60335-1:2010 - up to 750°C and Needle Flame test acc. to IEC 60695-11, up to 30sec.
- Resistant to chemicals and oil

- Permanently elastic, abrasion-resistant and comfortable
- RoHS compliant
- Anti-reflective surface makes working easier
- Two-layer ESD table mat (dissipative/conductive)
- Surface resistance is $10^6 - 10^7$ Ohm (EN 61340-2-3)

| | |
|---|--|
| Item no. | WL43664 |
| Model | SG-TBRO-HB-GL-ODK-10000X600X2 |
| Manufacturer | SAFEGUARD |
| Manufacturer article no. | SG-TBRO-HB-GL-ODK-10000X600X2 |
| GPSR manufacturer data | Weidinger GmbH Hertha-Sponer-Str. 1a DE-82216 Gernlinden |
| Length | 10000 mm |
| Width | 600 mm |
| Height | 2 mm |
| Sales unit | 1 rolls |
| Content unit | 1 rolls |
| Manufacturer colour information | light blue |
| Colour | blue |
| Material | Natural rubber & synthetic rubber |
| Incl. battery | no |
| RoHS compliant | yes |
| Typical surface resistance (Rpp) | $10^6 - 10^7$ Ohm (EN 61340-2-3) |
| Type of surface | table cover |
| ESD certification according to IEC 61340-5-1:2016 | yes |
| Temperature resistance | Glow wire test acc. to IEC 60335-1:2010 - up to 750°C |
| Typical volume resistivity (RV) EN 61340-2-3 | 10^6 Ohm |
| Hardness ISO 7619 | shore A 75 |
| Material resistance/pressure EN/ISO 24343-1 | < 0,20mm |
| Abrasion resistance ISO 4649 (Met. A-5N) | < 200 mm ³ |
| Flexibility EN/ISO 24344 (Met.AO 20mm) | yes |
| Flammability | Needle Flame test acc. to IEC 60695-11, bis 30sec. |
| Slip resistance, dynamic COF EN13893 | > 0,30 |
| Resistance to stains EN/ISO 26987 | Resistant, depending on concentration and duration of contact |

| | |
|--|-----------------------------------|
| Resistance to oil and grease (ASTM D471) | Limited change in volume and mass |
| Incl. earthing cable | no |
| Incl. earthing point | no |
| Surface | Two-layer ESD table covering |
| Corners | angular |
| ESD compliant | yes |

Other versions

| Item no. | Width |
|----------------|---------------|
| WL43664 | 600 mm |
| WL34488 | 1000 mm |
| WL34484 | 1200 mm |