


ESD floor tile, T-Lock, light gray, 500 x 500 x 7 mm, 4 pieces

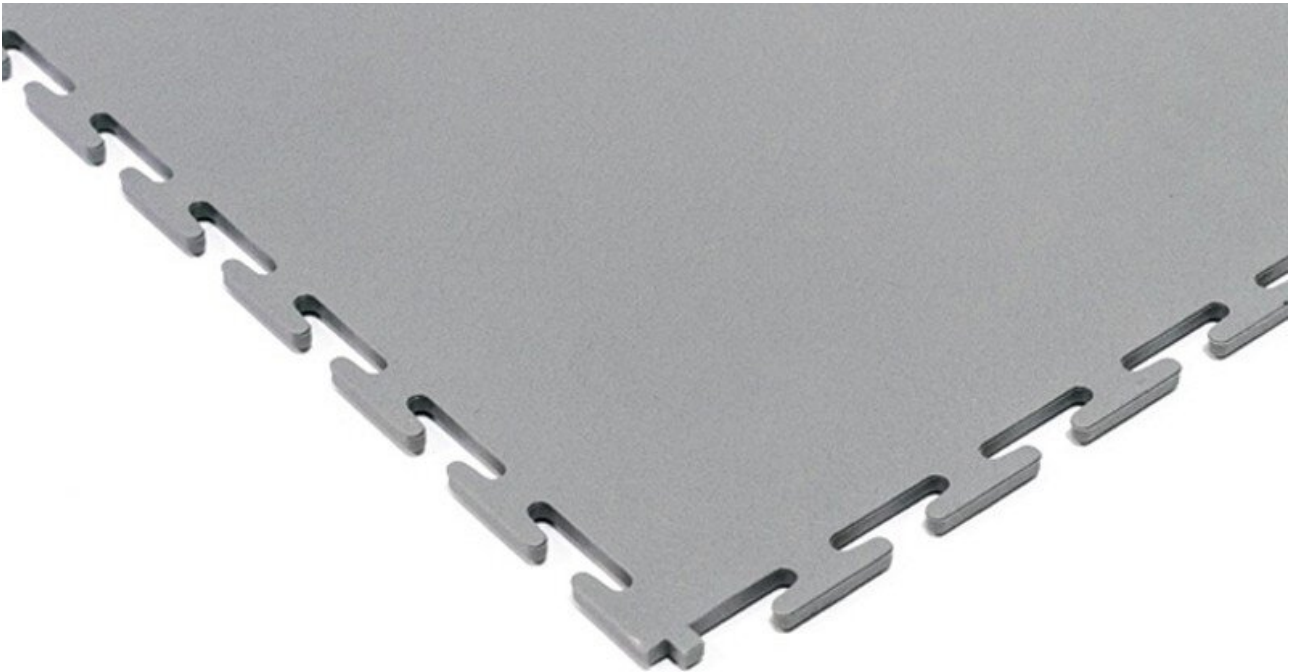

Important: Please note the installation instructions for ecotile floor tiles. These instructions are available under "Documents" > "Download technical data sheet".

- certified according to ISO90001
- ISO 61340/5
- EN 1081, EN 1815 & EN6356
- Surface resistance of the tiles is between 3.0×10^4 Ohm/m² and 3×10^6 Ohm
- Resistance to ground is between 3.6×10^5 Ohm and 9.5×10^5 Ohm
- fire retardant - class Bfl s1
- slip-resistant
- chemical-resistant
- reduces dust and noise
- easy installation thanks to interlocking joints - click-and-use installation
- Insulation of the floor against cold and humidity

item number	WL43693
model	ECOTILE-E500/x/ESD.201
manufacturer	ECOTILE
manufacturer item number	E500/7/ESD201

Products for the electronic industry



GPSR manufacturer information

ecotile Flooring
 Sedgwick Road Unit 15
 GB-LU4 9DT Luton
 www.ecotileflooring.com

length	500 mm
width	500 mm
height	7 mm
order unit	1 PU
content unit	4 piece
colour	light grey
colour manufacturer	light gray (RAL 7004)
Colour	light grey
Interlocking system	T-Lock
surface texture	flat
Strength	7 mm
type of lining	floor tile
ESD safe	yes

Other versions

item number	Strength
WL43693	7 mm