


ESD floor tile, T-Lock, light gray, 500 x 500 x 7 mm, 4 pieces

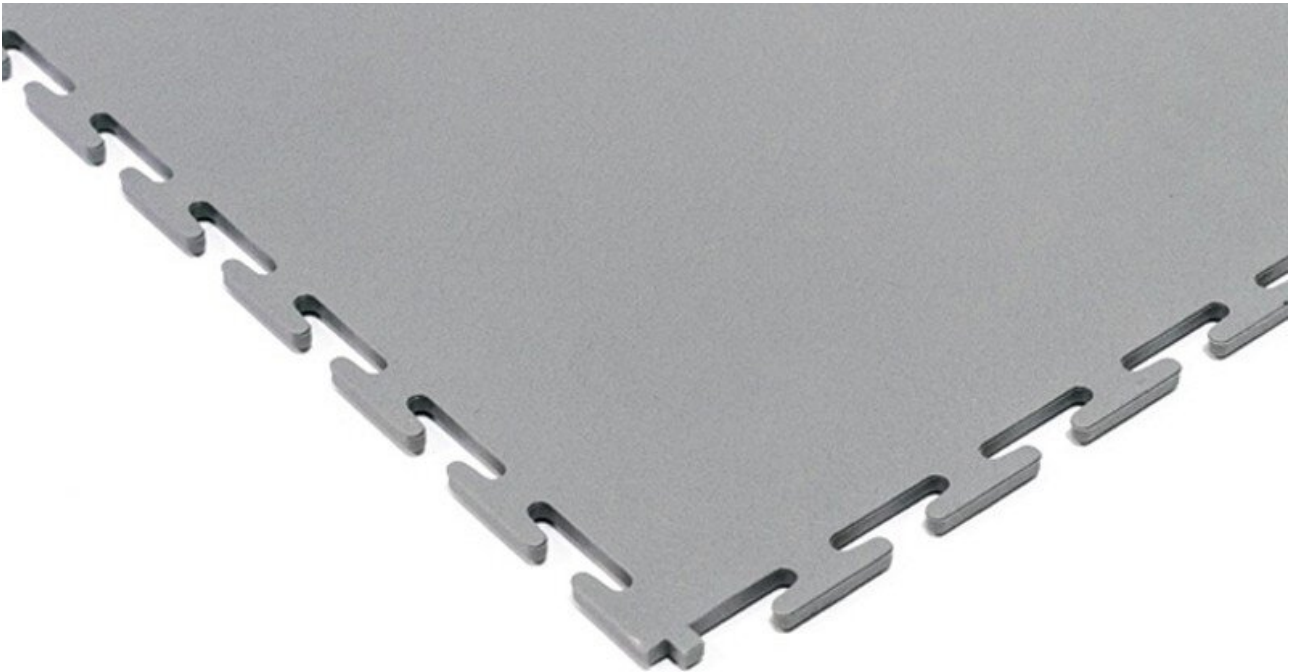

- certified according to ISO90001
- ISO 61340/5
- EN 1081, EN 1815 & EN6356
- Surface resistance of the tiles is between 3.0×10^4 Ohm/m² and 3×10^6 Ohm
- Resistance to ground is between 3.6×10^5 Ohm and 9.5×10^5 Ohm
- fire retardant - class Bfl s1
- slip-resistant
- chemical-resistant
- reduces dust and noise
- easy installation thanks to interlocking joints - click-and-use installation
- Insulation of the floor against cold and humidity

Item no.	WL43693
Model	ECOTILE-E500/x/ESD.201
Manufacturer	ECOTILE
Manufacturer article no.	E500/7/ESD201
GPSR manufacturer data	ecotile Flooring Sedgwick Road Unit 15 GB-LU4 9DT Luton

www.ecotileflooring.com

Length	500 mm
Width	500 mm
Height	7 mm
Sales unit	1 PU
Content unit	4 piece
Manufacturer colour information	light gray (RAL 7004)
Colour	light grey
Incl. battery	no
Connection system	T-Lock
Surface texture	flat
Strength	7 mm
Type of surface	floor tile
ESD compliant	yes

Other versions

Item no.	Strength
WL43693	7 mm