


ESD floor tile, light grey, 4 pieces, 500 x 500 x 5 mm

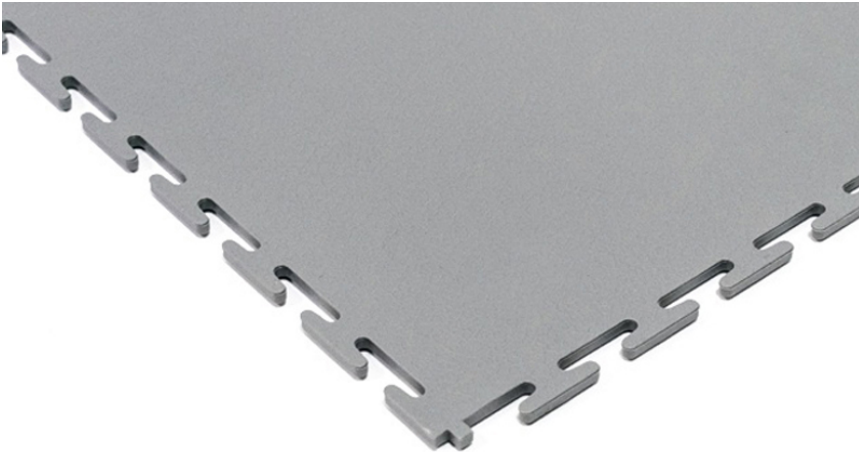

Description

- certified according to ISO90001
- ISO 61340/5
- EN 1081, EN 1815 & EN6356
- Surface resistance of the tiles is between 3.0×10^4 Ohm/m² and 3×10^6 Ohm
- Contact resistance is between 3.6×10^5 Ohm and 9.5×10^5 Ohm
- fire retardant - class Bfl s1
- slip-resistant
- chemical-resistant
- reduces dust and noise
- easy installation thanks to interlocking joints - click-and-use installation
- Insulation of the floor against cold and humidity

Product details

item number	WL43744
manufacturer	ECOTILE
colour manufacturer	RAL7004
manufacturer item number	E500/5/ESD201
model	ecotile flooring

dimensions (LxWxH)	500 mm x 500 mm x 5 mm
order unit	PU
content unit	4 piece
surface texture	hard
Strength	5 mm
type of lining	floor tile
ESD safe	yes

