


Suction arm system DN75 for wall/ceiling mounting, 3 joints, white, 550 mm

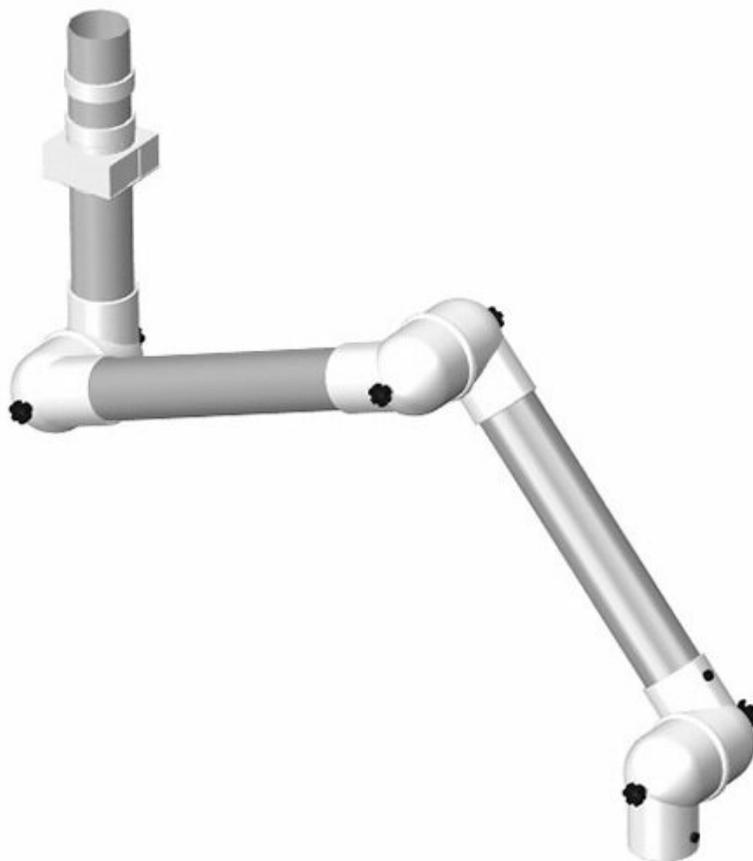

Alcident's DN75 system can be used in a wide range of applications, including laboratories, laser technology, chemical and pharmaceutical industries, as well as school classrooms. The tubes have a diameter of 75 mm and the recommended air volume is 80 m³/h to 180 m³/h.

- Maintenance-free O-rings
- Integrated throttle valve that is open from the airflow to ensure maximum flow
- Threaded rods, springs and thumbscrews made of acid-resistant stainless steel (AISI 316L)
- Acid-resistant POP[®] rivets for increased durability even when used in aggressive environments
- Protective grille (accessory) to prevent the ingress of foreign objects
- Components RoHS compliant

Item no.

WL44063

Products for the electronic industry



Model	75-3535-3-5
Manufacturer	ALSIDENT
Manufacturer article no.	75-3535-3-5
GPSR manufacturer data	Alsident system A/S Finlandsvej 10 DK-8450 Hammel www.alsident.com
Sales unit	1 piece
Content unit	1 piece
Colour	white
Material	Anodised aluminium tubes - layer thickness 10μ, joints made of impact-resistant, chemically resistant polypropylene (PP)
Product series	Alsident System 75 AL
Number of joints	3
Reach	550 mm
Pipe diameter	75 mm
Air volume of the extraction arm	80 – 180 m ³ /h
Mounting type	ceiling mounting, wall mounting
Joint colour	white
ESD compliant	no

Other versions

Item no.	Reach
WL44063	550 mm
WL34602	1060 mm