


Soldering tip ERSADUR, 2.0mm/0.079in, 10 pcs

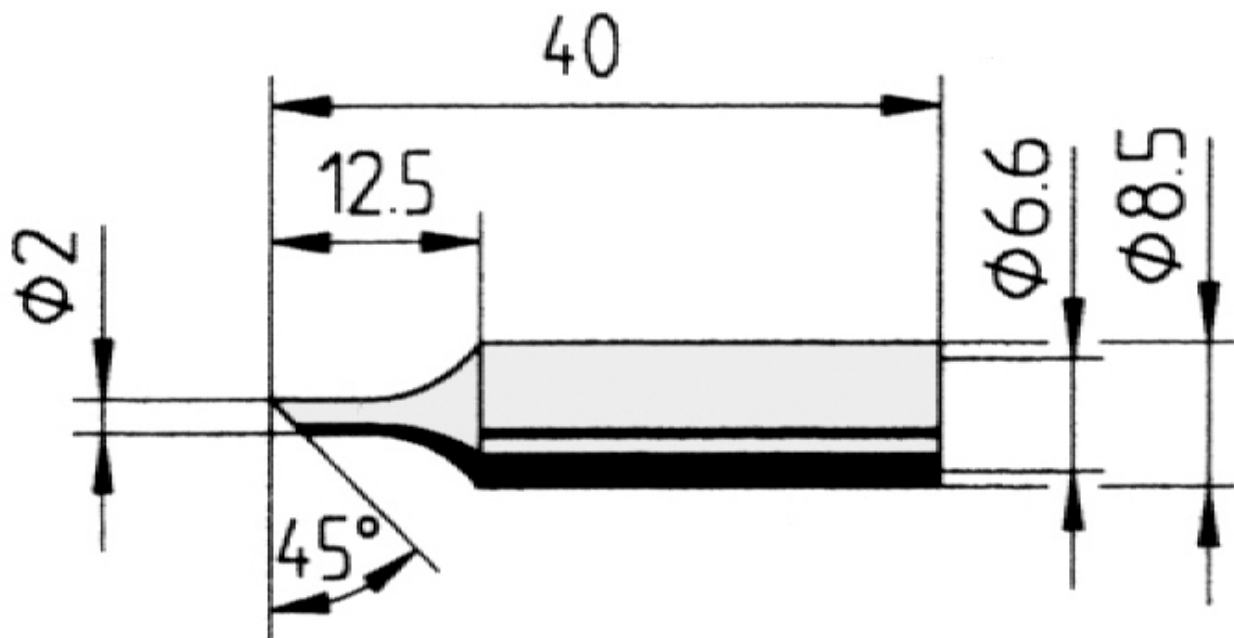

- Continuous soldering tip, straight, bevelled 45° angle, 2.0 mm diameter, with ERSADUR-LF coating (lead-free soldering) for increased service life.
- suitable for the soldering stations ANANLOG60, ANALOG60A, DIGITAL80, DIGITAL80A, DIGITAL2000A, RDS80, MICRO-CON60, TWIN80A, ELS8000/M/D, MS6000 as well as MS8000

item number	WL51121
manufacturer	ERSA
manufacturer item number	0832FDLF/10
length with packaging	70 mm
width with packaging	55 mm
height with packaging	20 mm
order unit	1 PU
content unit	10 piece
product series	832
RoHS conform	yes
Tip series	832

inner diameter shaft	6.6 mm
outer diameter shaft	8.5 mm
tip length	40 mm
soldering tip diameter	2 mm
tip shape	tapered
tip alignment	straight
suitable handpiece	ERGO TOOL, MULTI-PRO, MULTI-SPRINT, MULTI-TC, POWER-TOOL, PTC 70
suitable handle	Power-Tool, Ergo-Tool, Multi-Pro, Multi-TC, PTC 70, Multi-Sprint