


ESD Euro box trolley, max. load 250kg, with 3 open shelf frames for 1 Euro box each, 610x410mm

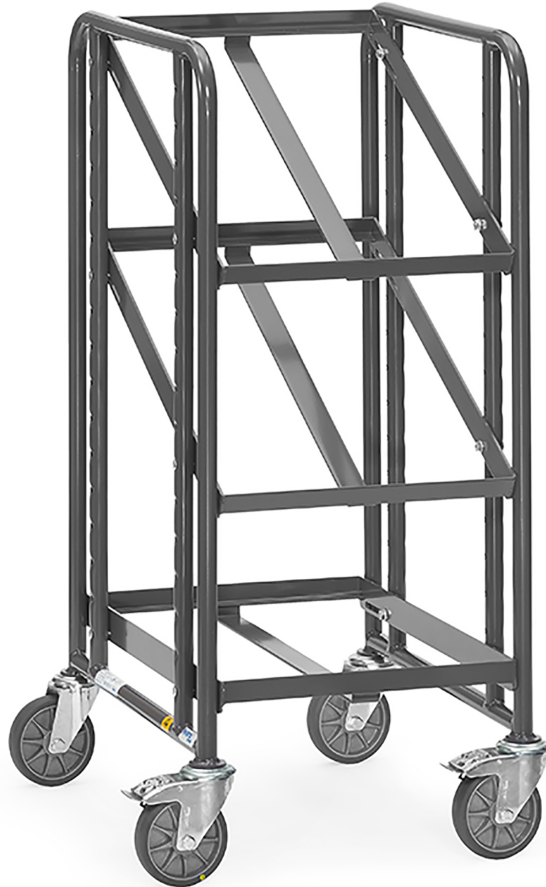

Electrically conductive design (ESD = Electrostatic Discharge). Tubular steel and sectional steel welded, electrically conductive, powder coated slate grey RAL 7015. Screw construction. Shelves made of electrically conductive derived timber material board to DIN 68765, light grey. 4 swivel castors with TPE-ESD tyres (thermoplastic elastomer), electrically conductive. Hubs with precision deep groove ball bearings. 2 with wheel stops, in accordance with EN 1757-3 (safety of platform trolleys). 3 shelf frames for 1 or 2 Euro boxes 600 x 400 mm each, can be variably screwed in, pitch 50 mm, inclination for sloping installation 15° or 30°. Load capacity per platform 80 kg.

item number	WL60154
manufacturer	FETRA
manufacturer item number	9380

Products for the electronic industry



length	525 mm
width	666 mm
height	1101 mm
order unit	1 piece
content unit	1 piece
colour manufacturer	slate grey
Colour	anthracite, grey
material frame	Tubular steel
load capacity per shelf	80 kg
model transport trolley	shelf trolley
load capacity	250 kg
number of swivel castors	4
tyres	TPE
tyre diameter	125 mm
wheel bearing	ball bearing
tyre width	32 mm
load platform length	610 mm
load platform width	410 mm
number of shelves	3
shelf height 1	238 mm
shelf height 2	538 mm
shelf height 3	838 mm
ESD safe	yes