


ESD floor tile, X-Lock, light gray, 497 x 497 x 7 mm, 4 pieces

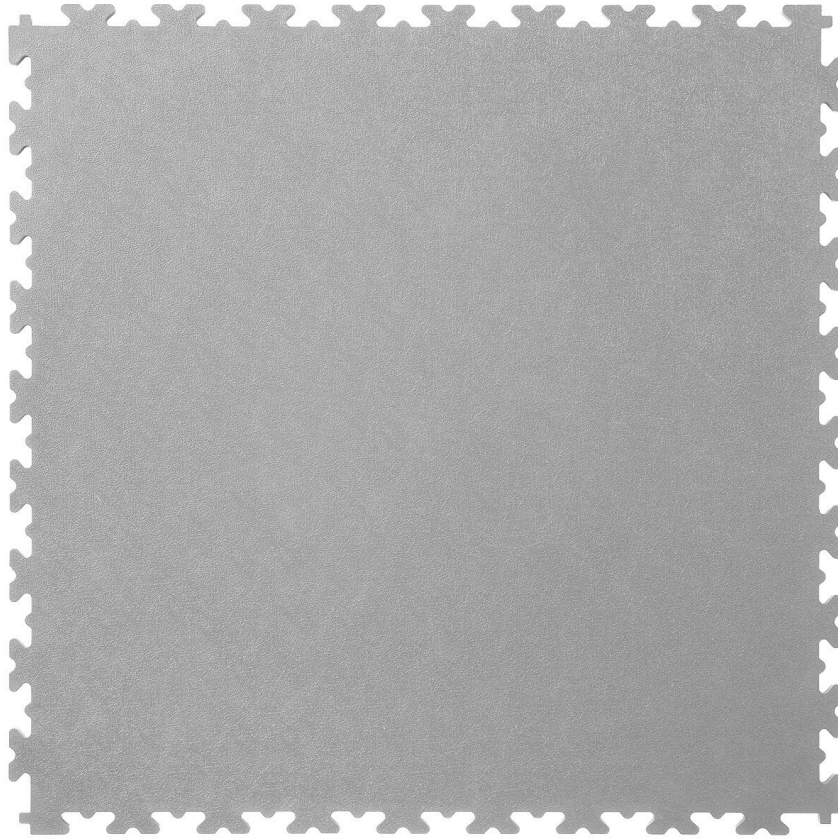

The 7 mm ESD X-Lock tile offers a super-modern and virtually seamless appearance when laid. Suitable for use in cleanrooms, data centers, pharmaceutical facilities and electronic production/assembly facilities, our newly developed ESD tile offers standard compliance to IEC 61340-5-1:2016. The new surface texture improves compliance with the ESD Walking Test and provides the necessary slip resistance to increase workplace safety. The ESD X tile is available in two colors and can be installed without downtime, special adhesive or screed. ESD tiles are connected with conductive earthing tape, the earthing can be earthed via the earthing tile, an earthing cable to an earthing plug or earthing rail, in accordance with the installation instructions. One ESD earthing tile must be used every 50 square meters.

Note: Please observe the installation instructions for floor tiles from ecotile. These are available under "Documents" > "Download technical data sheet".

Article no.	WL60417
Model	ECOTILE-X500/ESD/201
Manufacturer	ECOTILE
Manufacturer article no.	X500/7/ESD201
GPSR manufacturer data	ecotile Flooring Sedgwick Road Unit 15 GB-LU4 9DT Luton www.ecotileflooring.com
Length	497 mm
Width	497 mm
Height	7 mm
Sales unit	1 PU
Content unit	1 Packaging unit
Manufacturer colour information	light gray (RAL 7004)
Colour	light grey
Connection system	X-Lock
Surface texture	flat
Strength	7 mm
Type of surface	floor tile
ESD compliant	yes

Other versions

Article no.	Strength
WL85277	5 mm
WL60417	7 mm
WL83722	10 mm