


long nose, up to 1.5kg

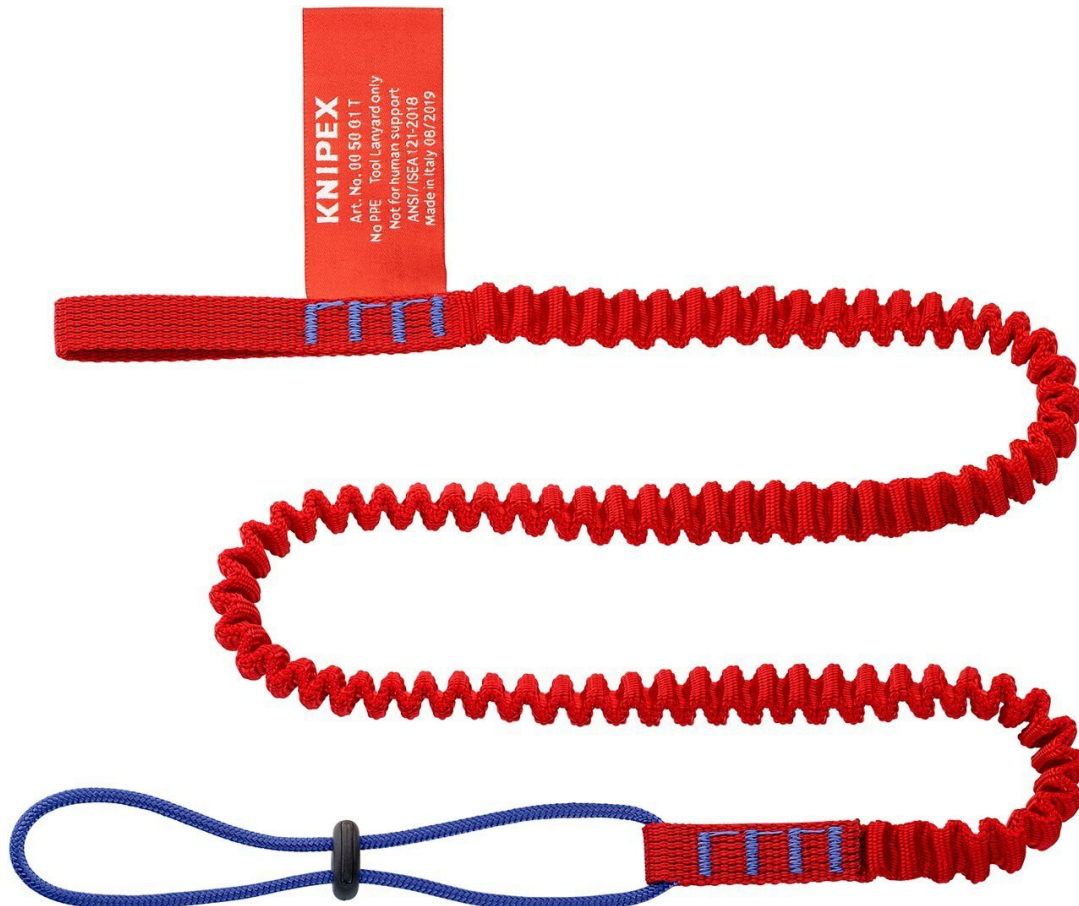

For use in building construction, civil engineering, building maintenance; by industrial climbers, roofers, mountaineers, in climbing sports, trade fair construction. Reliably protects the tool from falling down. Prevents loss of the tool, injury to living beings and damage to objects. Large working radius: long trap line for comfortable work. Versatile use: tether can be attached directly to wrist, belt, climbing equipment, etc. with the cord. Connection to KNIPEX Tethered Tools* also possible without carabiner. The trap line made of shirred fabric tape expands to a length of approx. 1.5 m under load. With loop of sewn flat belt at one end and sewn-in cord with cord stopper at the other end. Not approved for personal safety! Max. Max. load: 1.5 kg tool weight. Suitable for all KNIPEX pliers with fastening eyelet. - Max. load: 1.5 kg / 3.3 lbs

- For use in structural engineering, civil engineering, building maintenance
- For industrial climbers, roofers, mountaineers, in climbing sports, trade fair construction
- Reliably protects the tool from falling down
- Prevents loss of the tool, injury to living beings and damage to objects
- Large working radius: long trap line for comfortable work

- Versatile use: the cord can be attached directly to the wrist, belt, climbing equipment etc.
- Connection to KNIPEX Tethered Tools* also possible without carabiner
- The rope made of shirred fabric tape expands to a length of approx. 1.5 m under load
- With loop made of sewn flat belt at one end and sewn-in cord with cord stopper at the other end
- Not approved for personal safety!
- Max. Max. load: 1.5 kg tool weight
- Suitable for all KNIPEX pliers with fastening eyelet

Item no.	WL61263
Model	00 50 01 T BK
Manufacturer	KNIPEX
Manufacturer article no.	00 50 01 T BK
GPSR manufacturer data	KNIPEX-Werk Oberkamper Strasse 13 DE-42349 Wuppertal-Cronenberg www.knipex.de
Length	1000 mm
Width	16 mm
Height	10 mm
Length with packaging	246 mm
Width with packaging	85 mm
Height with packaging	24 mm
Volume with packaging	0.5 dm ³
Sales unit	1 piece
Content unit	1 piece
Type of packaging	single pack
Incl. battery	no
RoHS compliant	no
VDE	no
ESD compliant	no
Grip (expression)	Tethered Tools