


Spare length stop for 12 42 / 52 195

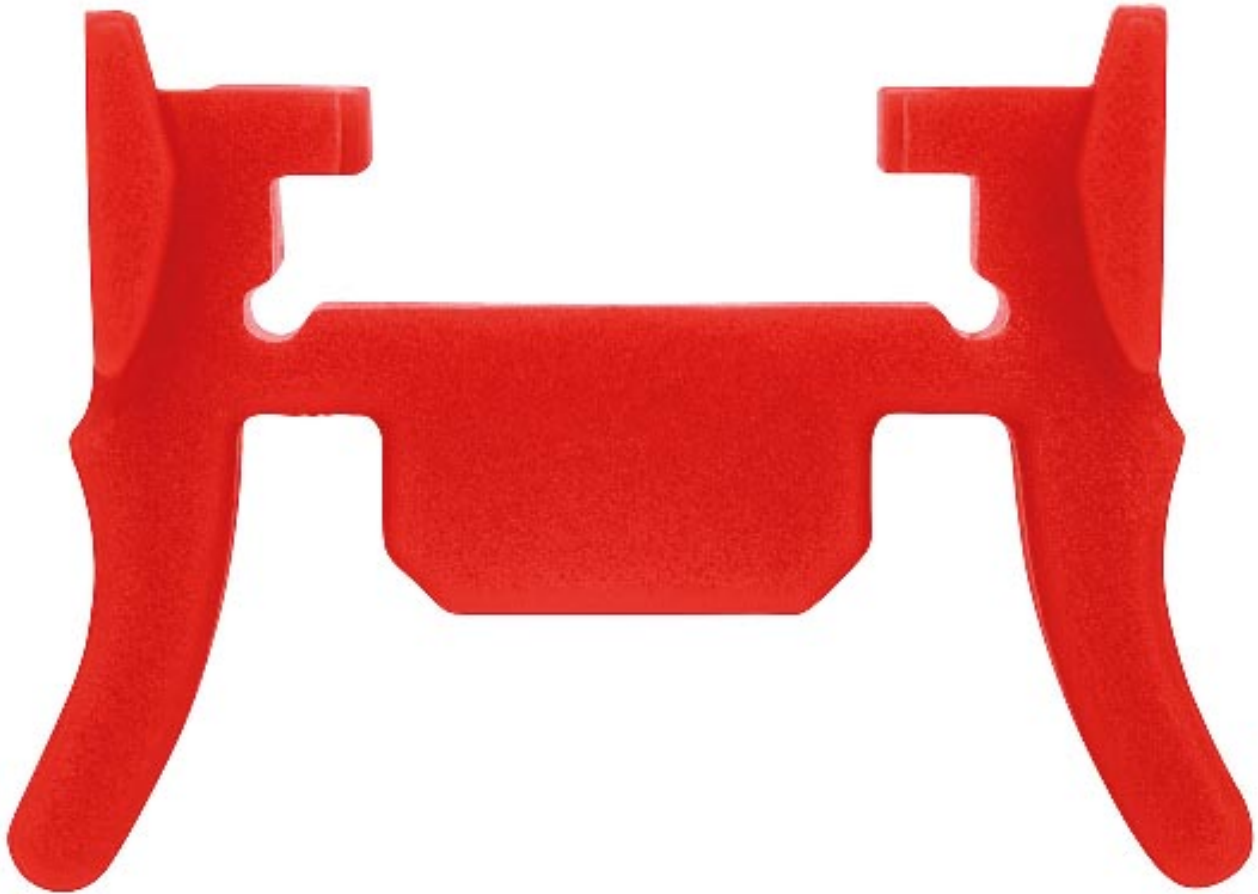

Replacement length stop for 12 42 / 52 195 Stripping without readjustment from 0.03 to 10.0 mm². recessed wire cutter. universal blade geometry - robust and durable. recessed wire cutter. Fully automatic adjustment to all solid, stranded and fine-stranded conductors with standard insulation in the entire capacity range from 0.03 to 10.0 mm². No manual fine adjustment necessary. No damage to the conductors. The steel clamping jaws hold the cable firmly without slipping and without damaging the remaining insulation. With recessed wire cutter for stranded copper and aluminium conductors up to 10 mm² and solid conductors up to 6 mm². Particularly smooth-running mechanism and very low weight.

Blade block and length stop interchangeable. Handle with soft plastic zone for secure grip.

- Fully automatic adjustment to all solid, stranded and fine-stranded conductors with standard insulation in the entire capacity range from 0.03 to 10.0 mm².
- No manual fine adjustment necessary
- No damage to the conductors
- The steel clamping jaws hold the cable firmly without slipping and without damaging the remaining insulation

- With recessed wire cutter for stranded Cu and Al conductors up to 10 mm² and solid conductors up to 6 mm²
- Particularly smooth-running mechanics and very low weight
- Replaceable blade block and length stop
- Handle with soft plastic zone for secure grip

| | |
|--------------------------|-----------------------|
| item number | WL61331 |
| model | 12 49 23 |
| manufacturer | KNIPEX |
| manufacturer item number | 12 49 23 |
| length | 16 mm |
| width | 12 mm |
| height | 11 mm |
| length with packaging | 25 mm |
| width with packaging | 15 mm |
| height with packaging | 10 mm |
| Packaging volume | 0.004 dm ³ |
| order unit | 1 piece |
| content unit | 1 piece |
| type of packaging | single pack |
| RoHS conform | no |
| VDE | no |
| ESD safe | no |