


Diagonal cutter for electrical mechanics, chrome-plated, 125 mm

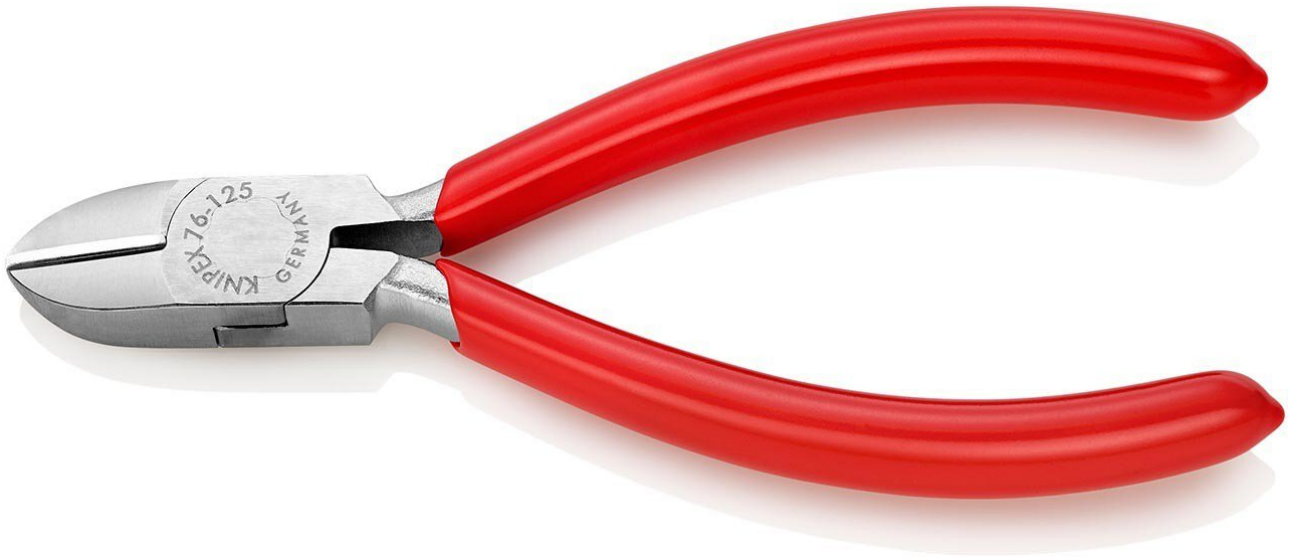

With sharp, precisely closing cutting edges. Cutting edges additionally induction hardened, cutting edge hardness approx. 63 HRC. Inlaid joint. With facet. - Shape: 0 - cutting values medium hard wire (diameter): Ø 2,3mm - cutting values hard wire (diameter): Ø 1,5mm - cutting values soft wire (diameter): Ø 0,4 - 3mm - jaw length (B): 16mm - jaw thickness (at joint) (D): 9mm - head width (A): 14,5mm

- With sharp, precisely closing cutting edges
- Cutting edges additionally induction hardened, cutting edge hardness approx. 63 HRC
- Inlaid joint

item number	WL61716
model	76 03 125
manufacturer	KNIPEX
manufacturer item number	76 03 125
GPSR manufacturer information	KNIPEX-Werk Oberkamper Strasse 13 DE-42349 Wuppertal-Cronenberg www.knipex.de
length	124 mm
width	53 mm
height	12 mm

Products for the electronic industry



length with packaging	150 mm
width with packaging	81 mm
height with packaging	35 mm
Packaging volume	0.425 dm ³
order unit	1 piece
content unit	1 piece
type of packaging	single pack
standards	DIN ISO 5749
RoHS conform	no
surface	chrome-plated
VDE	no
jaw thickness	9 mm
ESD safe	no
description head	chrome-plated
type of handle	Covered with plastic
length of jaws	16 mm
cutting value wire diameter hard	1.5 mm
cutting value wire diameter medium	2.3 mm
cutting value wire diameter soft	3 mm
type of pliers	electronic pliers