


Crimping pliers, painted black, 230 mm

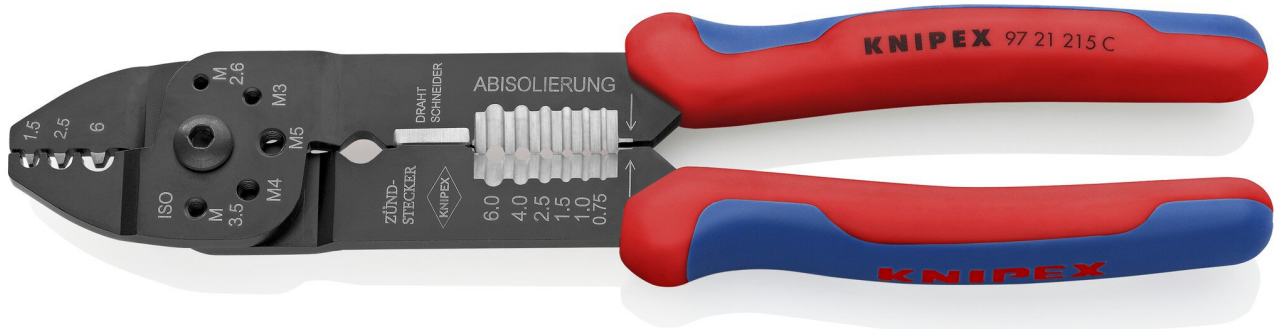

For cutting cables, stripping wires and crimping insulated and uninsulated cable lugs and connectors and open connectors. With threaded holes for cutting copper or brass threaded pins with M 2.6; M 3; M 3.5; M 4 and M 5. Screwed joint for high stability and smooth running. - Application: uninsulated cable lugs + cable connectors - Capacity square millimetres: 0.5 - 6.0mm² - Number of nests: 3 - AWG: 20 - 10

- For cutting cables, stripping wires and crimping insulated and uninsulated cable lugs and connectors and open connectors
- With threaded holes for cutting copper or brass threaded pins with M 2.6
- M 3
- M 3,5
- M 4 and M 5
- Screwed joint for high stability and smooth running

Item no.	WL61940
Model	97 21 215 C
Manufacturer	KNIPEX
Manufacturer article no.	97 21 215 C
GPSR manufacturer data	KNIPEX-Werk Oberkamper Strasse 13 DE-42349 Wuppertal-Cronenberg www.knipex.de
Length	230 mm
Width	63 mm
Height	25 mm
Length with packaging	255 mm
Width with packaging	85 mm

Products for the electronic industry



Height with packaging	93 mm
Volume with packaging	2.016 dm ³
Sales unit	1 piece
Content unit	1 piece
Type of packaging	single pack
Incl. battery	no
RoHS compliant	no
Surface	black lacquered
VDE	no
Crimping application	uninsulated cable lugs + cable connectors
Number of crimp nests	3
ESD compliant	no
AWG	20 - 10
Crimp profile	Mandrel crimp (narrow)
Tool length	230 mm
Grip (expression)	with multi-component sleeves
Type of pliers	crimping pliers