


Crimping pliers, painted black, with multi-component sleeves, 240 mm

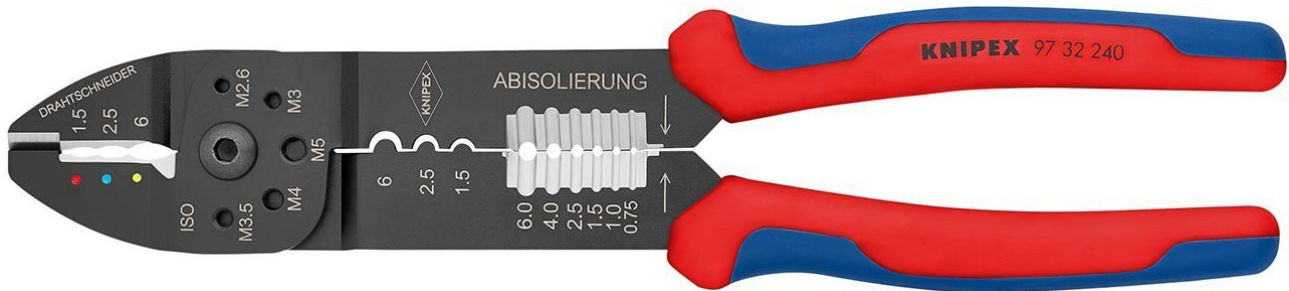

For cutting cables, stripping wires and crimping insulated and uninsulated cable lugs and connectors and open connectors. With threaded holes for cutting Cu or Ms threaded pins with M 2.6; M 3; M 3.5; M 4 and M 5. Screwed joint for high stability and smooth running. -

Application: insulated cable lugs + cable connectors
uninsulated cable lugs + cable connectors - Capacity square millimetres: 0.5 - 6.0mm² - Number of nests: 3 - AWG: 20 - 10

- For cutting cables, stripping wires and crimping insulated and uninsulated cable lugs and connectors and open connectors
- With threaded holes for cutting copper or brass threaded pins with M 2.6
- M 3
- M 3,5
- M 4 and M 5
- Screwed joint for high stability and smooth running

Item no.	WL61944
Model	97 32 240
Manufacturer	KNIPEX
Manufacturer article no.	97 32 240
GPSR manufacturer data	KNIPEX-Werk Oberkamper Strasse 13 DE-42349 Wuppertal-Cronenberg www.knipex.de
Length	240 mm
Width	62 mm
Height	25 mm
Length with packaging	255 mm
Width with packaging	115 mm

Products for the electronic industry



Height with packaging	92 mm
Volume with packaging	2.677 dm ³
Sales unit	1 piece
Content unit	1 piece
Type of packaging	single pack
Incl. battery	no
RoHS compliant	no
Surface	black lacquered
VDE	no
Crimping application	insulated cable lugs + cable connectors;uninsulated cable lugs + cable connectors
Number of crimp nests	3
ESD compliant	no
AWG	20 - 10
Crimp profile	Mandrel crimp (narrow), Oval crimp
Tool length	240 mm
Grip (expression)	with multi-component sleeves
Type of pliers	crimping pliers