


## PVC tile X-Lock, black, smooth, 500x500x7 mm, 4 pieces

---

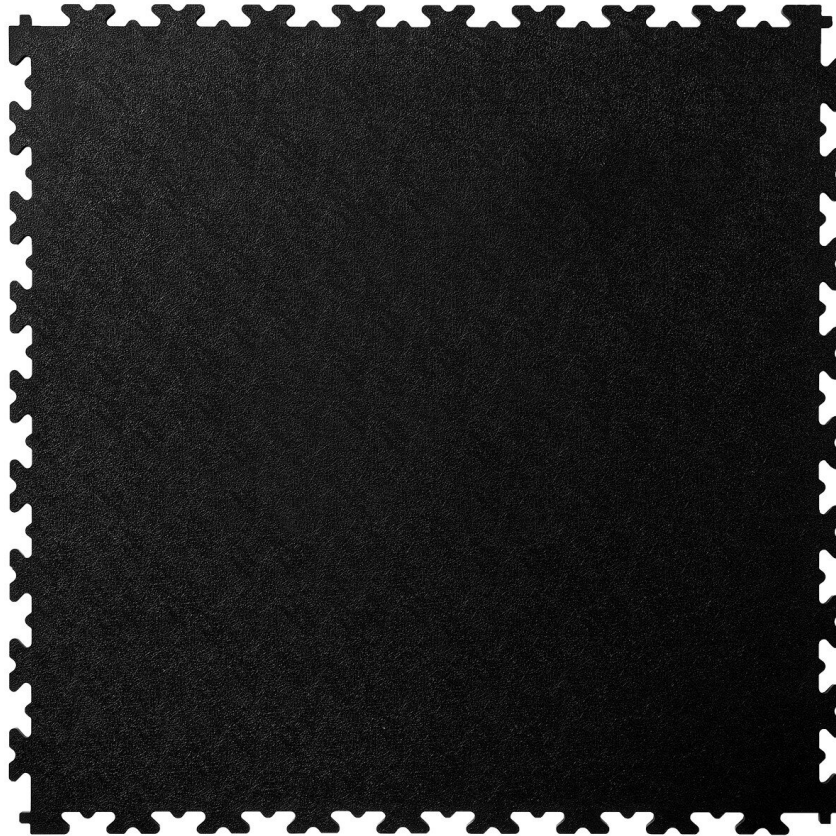

- 
- Manufactured in UK under ISO9001 standards
  - Made from REACH compliant PVC
  - 497mm x 497mm x 7mm
  - EN 1081, EN 1815 & EN6356
  - Surface resistance of the tiles is between  $3.0 \times 10^4$  Ohm/m<sup>2</sup> and  $3 \times 10^6$  Ohm
  - Contact resistance is between  $3.6 \times 10^5$  Ohm and  $9.5 \times 10^5$  Ohm
  - Fire retardant - class Bfl s1
  - Slip-resistant
  - Chemical-resistant
  - Reduces dust and noise
  - Click-and-use installation
  - Insulation of the floor against cold and humidity

Item no.

WL63392

---

Products for the electronic industry



Manufacturer	ECOTILE
Manufacturer article no.	X500/7/101
GPSR manufacturer data	ecotile Flooring Sedgwick Road Unit 15 GB-LU4 9DT Luton www.ecotileflooring.com
Length	500 mm
Width	497 mm
Height	7 mm
Sales unit	1 PU
Content unit	4 piece
Manufacturer colour information	black (RAL 9017)
Colour	black
Connection system	X-Lock
Surface texture	flat
Strength	7 mm
Type of surface	floor tile
ESD compliant	no

## Other versions

Item no.	Strength
<b>WL63392</b>	<b>7 mm</b>
WL85055	10 mm