
PVC tile X-Lock, black, smooth, 500x500x7 mm, 4 pieces

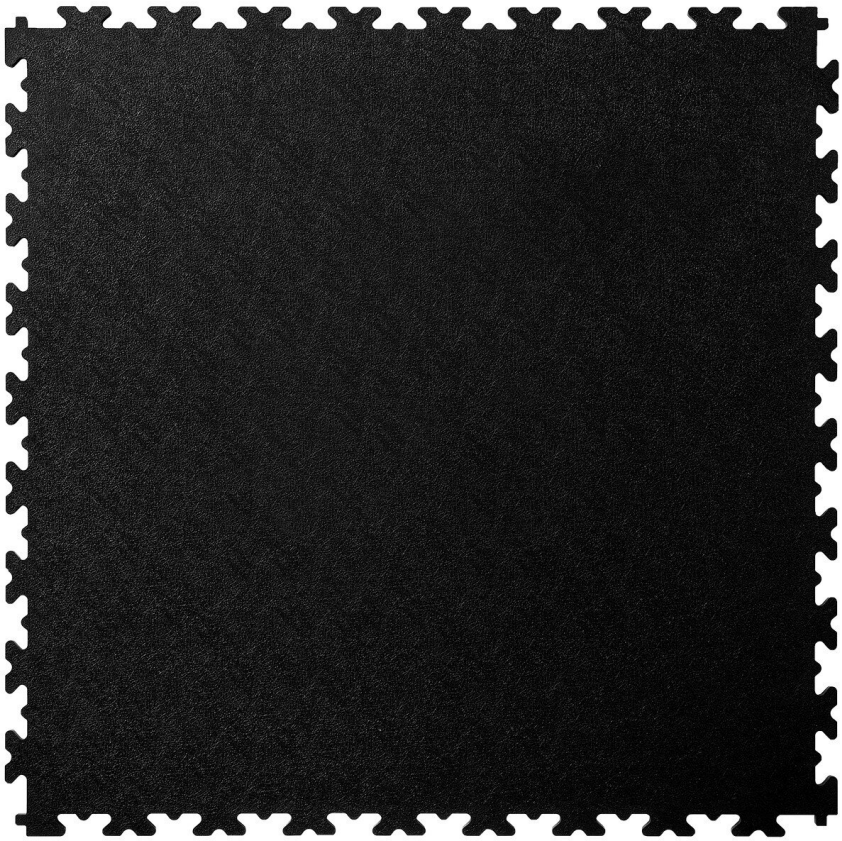

- Manufactured in UK under ISO9001 standards
- Made from REACH compliant PVC
- 497mm x 497mm x 7mm
- EN 1081, EN 1815 & EN6356
- Surface resistance of the tiles is between 3.0 x 10^4 Ohm/m2 and 3 x 10^6 Ohm
- Contact resistance is between 3.6 x 10^5 Ohm and 9.5 x10^5 Ohm
- Fire retardant - class Bfl s1
- Slip-resistant
- Chemical-resistant
- Reduces dust and noise
- Click-and-use installation
- Insulation of the floor against cold and humidity

Item no. **WL63392**

Manufacturer	ECOTILE
Manufacturer article no.	X500/7/101
GPSR manufacturer data	ecotile Flooring Sedgwick Road Unit 15 GB-LU4 9DT Luton www.ecotileflooring.com
Length	500 mm
Width	497 mm
Height	7 mm
Sales unit	1 PU
Content unit	4 piece
Manufacturer colour information	black (RAL 9017)
Colour	black
Connection system	X-Lock
Surface texture	flat
Strength	7 mm
Type of surface	floor tile
ESD compliant	no

Other versions

Item no.	Strength
WL63392	**7 mm**
WL85055	10 mm