


## Electrician spirit level 40 cm 400mm (42074)

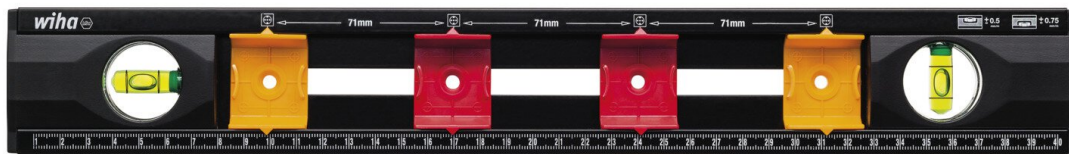

Simplifies your work: convenient dimensioning from different working positions thanks to cleverly positioned scales, even when viewed from above.

Increases your efficiency: Perfect visibility of both vials even at acute viewing angles.

Saves space: Perfect mobility, fits Wiha cases.

Saves time: Variable distance marking for up to 4 flush-mounted boxes.

Application: For horizontal and vertical measuring and marking of distances of flush-mounted sockets.

Especially when installing sockets on the floor, the electrician often has a hard time getting a good view of the level on the spirit level. In addition, unsightly notches often occur when marking out due to the vial recesses. The electrician's spirit level from Wiha now puts an end to these problems. Even at acute viewing angles, a perfect view of the vials is ensured. In addition, thanks to the continuous housing, the spirit level allows lines to be drawn without interruption. Even when viewed from above, the cleverly positioned scales enable convenient dimensioning. The variable distance markings for up to 4 flush-mounted boxes offer a further advantage in electrical installation. Thanks to the movable marking points for boxes, the spirit level can be adapted to the respective marking distances depending on the country specifications and can thus also be used in a variety of international applications. Thanks to its compact shape, the spirit level is also perfect for mobile use and can be conveniently stored in the Wiha electrician's case.

For electrical applications

- Blister packaging: Yes
- ESD Article: No
- Total length (mm): 400 mm
- width (mm): 56 mm
- with battery: No

Item no.	WL72810
Alternative article name	SB24691
Manufacturer	WIHA
Manufacturer article no.	42074

Products for the electronic industry



## GPSR manufacturer data

Wiha Werkzeuge GmbH  
Obertalstraße 3-7  
DE-78136 Schonach  
www.wiha.com

Sales unit	1 piece
Content unit	1 piece
Incl. battery	no
Product series	246
VDE	no
ESD compliant	no
Packaging dimensions	piece

