


ESD General soldering set for robots, 160 W, 21 V, HM245-5A

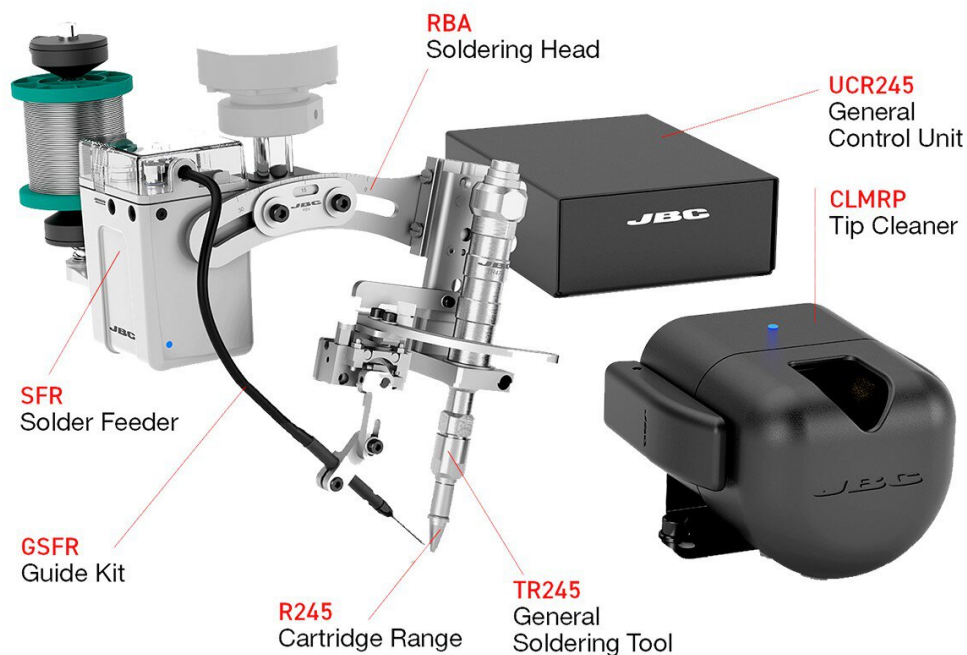

HM245-5A is a complete solution for selective general electronics applications. The cartridge is replaced manually.

This soldering set consists of:

- TR245 soldering tool with a cartridge centring system that perfectly positions the cartridge during replacement.
- SFR Solder Feeder with a solder wire perforation that allows for better flow of solder flux and outgassing, preventing solder splattering during soldering.
- CLRP Tip Cleaner, cleaning the soldering tip takes just one second, increasing heat transfer and improving soldering quality.
- Remote control of the UCR control unit by the robot (PC or PLC) via the RS232 JBC

Products for the electronic industry



communication protocol. Download it here.

R245 cartridges and GSFR guide set are not included.

- Complete solution for selective general electronics applications
- Cartridge is manually replaced
- Length of solder wire: 0.5 to 250 mm
- Speed of solder wire: 0.5 to 120 mm/s
- consists of:
 - TR245 soldering tool with a cartridge centring system
 - SFR Solder Feeder with solder wire perforation
 - CLRP Tip Cleaner
 - Remote control via RS232 JBC communication protocol
- R245 cartridges and GSFR guide set are not included

Item no.	WL73948
Model	HM245-5A
Manufacturer	JBC
Manufacturer article no.	HM245-5A
GPSR manufacturer data	JBC Soldering SL Ramón y Cajal 3 ES-08750 Molins De Rei www.jbctools.com
Length with packaging	545 mm
Width with packaging	345 mm
Height with packaging	275 mm
Sales unit	1 piece
Content unit	1 piece
Incl. battery	no
Power	160 W
Voltage	21 V
Temperature range °C	90 – 450 °C
Matching tips	R245
ESD compliant	yes
Wire diameter	0.5 – 1.5 mm