


Micro desoldering tweezers tip knife RTWMS 100 K

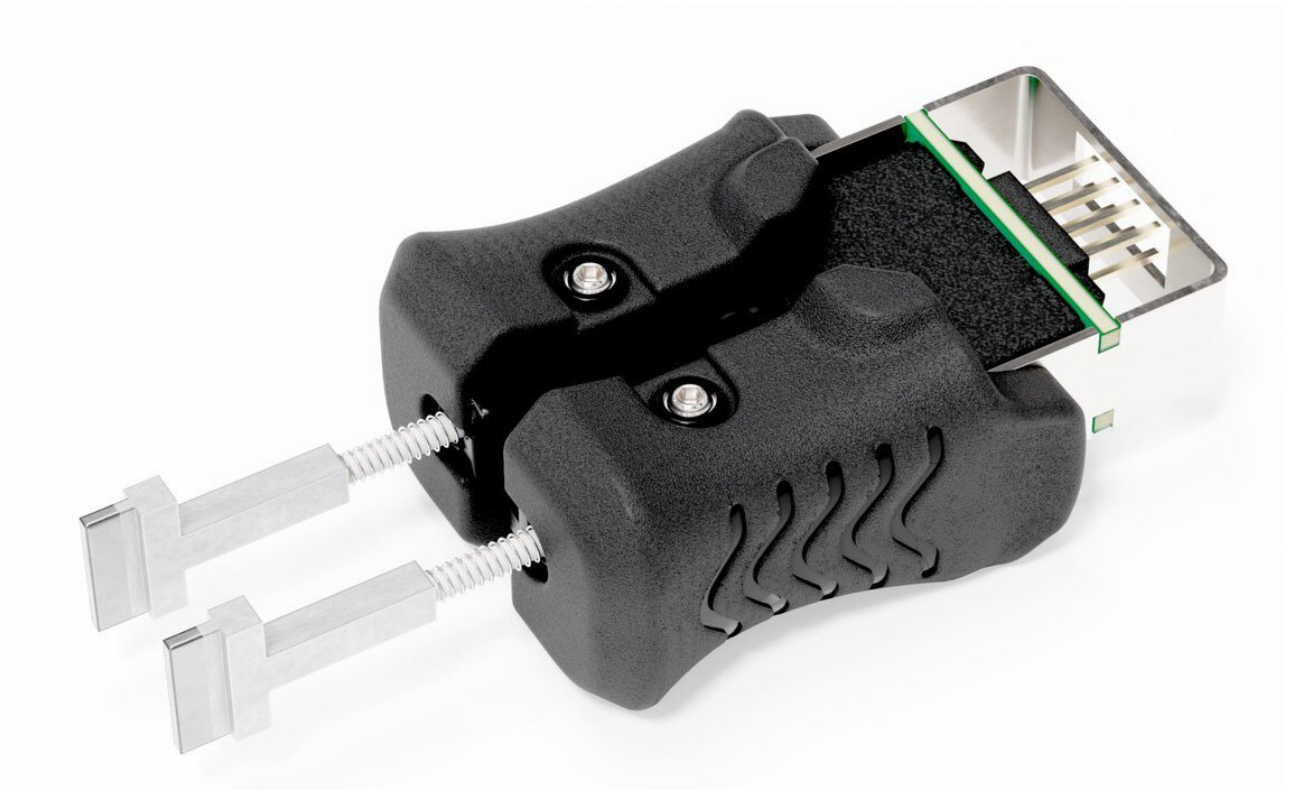

- Micro desoldering tweezers tip
- 2 x 40 W, 12 V
- Extremely fast 5-second heat-up time for maximum productivity
- Maximum protection: Military standard, Mil-Spec compliant and fully compliant with IPC industry standards (IPC - TM-650 2.5.33 Measurement of Electrical Overstress from Soldering Hand Tools)
- RTWMS Desoldering Tips for WTMT/ WXMTS Desoldering Irons
- Highest precision in soldering process due to short distance between tip and handle and optimized tip design; Precise positioning due to unique parallel sliding block guide; No alignment after tip change due to paired design (pre-aligned tips > time saving > increases productivity); Adjustment functions with Allen key: 1.5 mm possible if required ($\pm 80^\circ$ rotation angle adjustment + vertical length adjustment of $\pm 1.2\text{mm}$); Intelligent desoldering tweezers tips (allows automatic tip offset)
- Fastest desoldering tweezer tip change: Active Tip Cartridge System allows easy tip change even with hot desoldering tweezers, without the need for an additional tool or adjustment
- Improved comfort and safe handling due to new ergonomic softgrips
- Unique smart desoldering tweezers: Automatic Smart Tweezers tip identification; Full

traceability with tweezer tip ID number and integrated data storage; Accurate data results with tip offset function; Full process control with tip lock function

item number	WL74133
model	RTWMS 100 K
manufacturer	WELLER
manufacturer item number	T0050116499
GPSR manufacturer information	WELLER Tools GmbH Carl-Benz-Strasse 2 DE-74354 Besigheim www.weller.eu
length with packaging	98 mm
width with packaging	36 mm
height with packaging	27 mm
order unit	1 piece
content unit	1 piece
power	80 W
voltage	12 V
type of tip	MS
temperature range °C	100 – 450 °C
Tip series	RTW-MS
tip length	18.2 mm
tip length in inches	0.717 in
tip width	10 mm
tip width in inches	0.394 in
tip thickness	1 mm
tip thickness in inches	0.039 in
tip shape	knife-shaped
tip alignment	straight
suitable handle	WXMTS,WTMT
ESD safe	no