


## Floor ramp, X-Lock, graphite, 500 x 90 x 7 mm, 1 piece

---

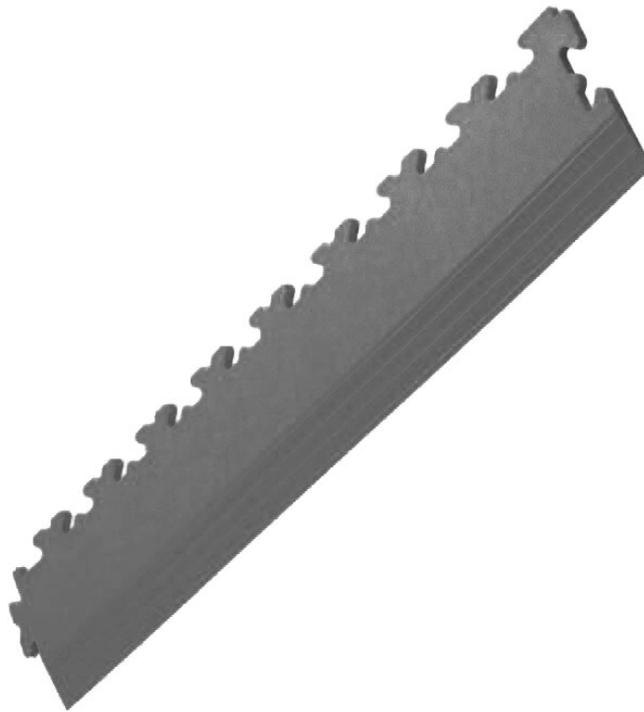

---

The 7 mm X-Lock floor ramp has been developed to create a safe, sloping ramp on your ESD floor tiles. Each ramp is connected to a tile using X-Lock technology. We recommend using floor ramps at doorways and large transitions to avoid tripping hazards. A floor ramp is 500 mm long and can be connected almost seamlessly to an entire tile.

Note: Please follow the laying instructions for floor tiles from ecotile. This is available under "Documents" > "Download technical data sheet".

- Manufactured in the UK to ISO9001 standards
- REACH compliant PVC
- EN 1081, EN 1815 & EN6356
- Fire retardant - class Bfl s1
- Slip resistant
- Chemical resistant
- Reduces dust and noise
- Click-and-use installation

- Insulates the floor against cold and moisture

<b>Item no.</b>	<b>WL83212</b>
Manufacturer	ECOTILE
Manufacturer article no.	X57.231/1
GPSR manufacturer data	ecotile Flooring Sedgwick Road Unit 15 GB-LU4 9DT Luton www.ecotileflooring.com
Length	500 mm
Width	90 mm
Height	7 mm
Sales unit	1 piece
Content unit	1 piece
Manufacturer colour information	graphite
Colour	graphite
Connection system	X-Lock
Surface texture	flat
Strength	7 mm
Type of surface	floor ramp
ESD compliant	no

## Other versions

Item no.	Strength
WL83212	7 mm
WL83210	10 mm