


## ESD floor tile SOFT, X-Lock, black, 497 x 497 x 7 mm, 4 pieces

---

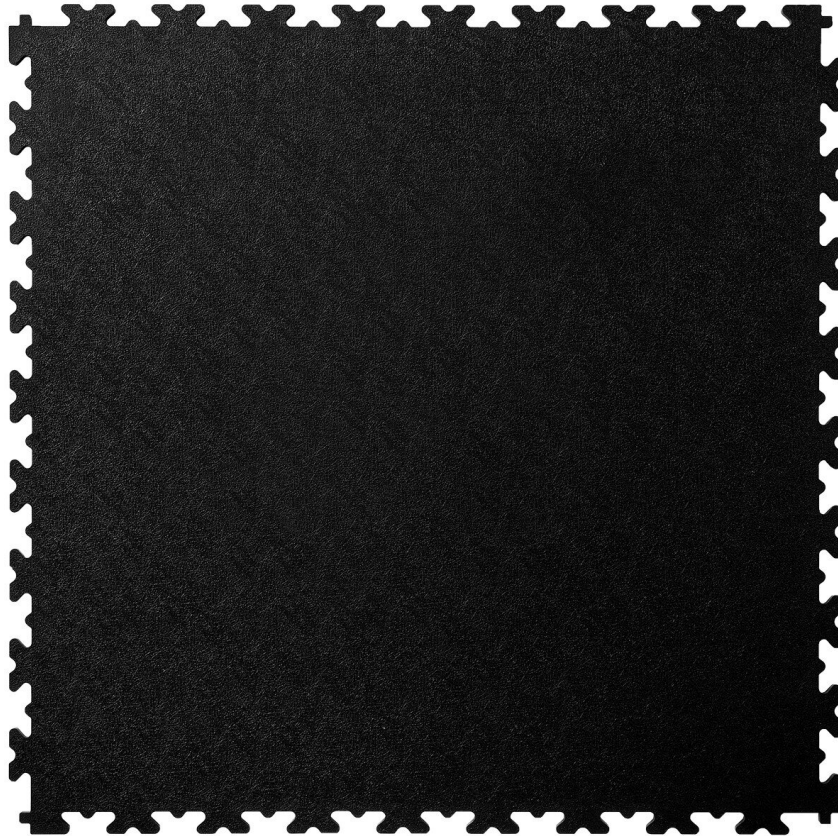

---

Note: Please follow the installation instructions for ecotile floor tiles. This is available under "Documents" > "Download technical data sheet".

Anti-fatigue tile (Shore A 60)

The 7 mm PVC X-Log tile offers a super-modern and virtually seamless appearance when laid. Suitable for commercial, domestic and light industrial applications to reduce dust and noise.

The new surface texture provides the necessary slip resistance to increase safety in the workplace.

The PVC X tile is available in a range of colors and can be installed without downtime, special adhesive or screed.

- Manufactured in the UK to ISO9001 standards
- REACH compliant PVC
- 497mm x 497mm x 7mm
- EN 1081, EN 1815 & EN6356
- Fire retardant - class Bfl s1

- Slip resistant R10
- Chemical resistant
- Reduces dust and noise
- Click-and-use installation
- Insulation against cold and moisture

item number	<b>WL83723</b>
manufacturer	ECOTILE
manufacturer item number	X500/7/AF/ESD101
GPSR manufacturer information	ecotile Flooring Sedgwick Road Unit 15 GB-LU4 9DT Luton www.ecotileflooring.com
length	497 mm
width	497 mm
height	7 mm
order unit	1 PU
content unit	1 Packaging unit
colour manufacturer	black (RAL 9017)
Colour	black
Interlocking system	X-Lock
surface texture	flat
Strength	7 mm
type of lining	floor tile
ESD safe	yes