


VDE-insulated slotted screwdriver with reduced blade diameter, 0.6 x 3.5 x 100 mm

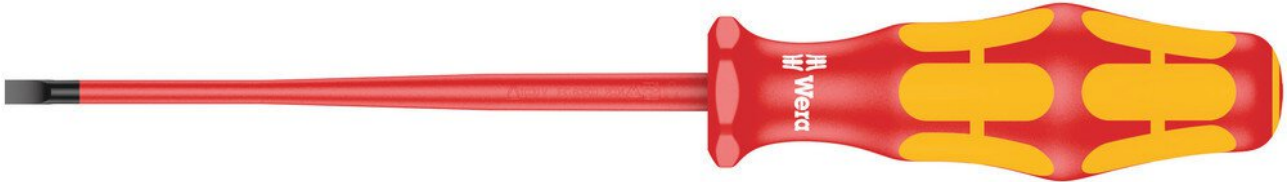

Reduced blade diameter with integrated protective insulation, enabling low-lying screw and spring elements to be reached and operated. Kraftform Plus handle for comfortable ergonomic working, preventing blisters and calluses. Hard grip zones for high working speed, while soft grip zones guarantee high torque transmission. Take it easy tool finder with color coding by profile and size stamping - for finding the required tool quickly and easily. Roll-off protection prevents annoying rolling away at the workplace.

- Insulated blades for safe working up to 1,000 volts
- Hard grip zones for high working speed, soft grip zones for high torque transmission
- With Take it easy tool finder: color coding according to profiles and size stamping
- With hexagonal roll-off protection to prevent rolling away
- With reduced blade diameter

Item no.	WL88493
Model	160 iS VDE
Manufacturer	WERA
Manufacturer article no.	05006440001
GPSR manufacturer data	WERA Werkzeuge GmbH Korzerter Strasse 21-25 DE-42349 Wuppertal-Cronenberg www.wera.de
Length	181 mm
Width	26 mm
Height	26 mm
Length with packaging	209 mm
Width with packaging	72 mm
Height with packaging	51 mm
Sales unit	1 piece
Content unit	1 piece

Incl. battery	no
VDE	yes
ESD compliant	no
Tool length	100 mm
Blade width	3.5 mm
Blade thickness	0.6 mm

Other versions

Item no.	Blade thickness x Blade width
WL88493	0.6 mm x 3.5 mm
WL88494	0.8 mm x 4 mm
WL88495	1 mm x 5.5 mm