
Cordon de dessoudage ESD, jaune, largeur 1,4mm, longueur 1,5m

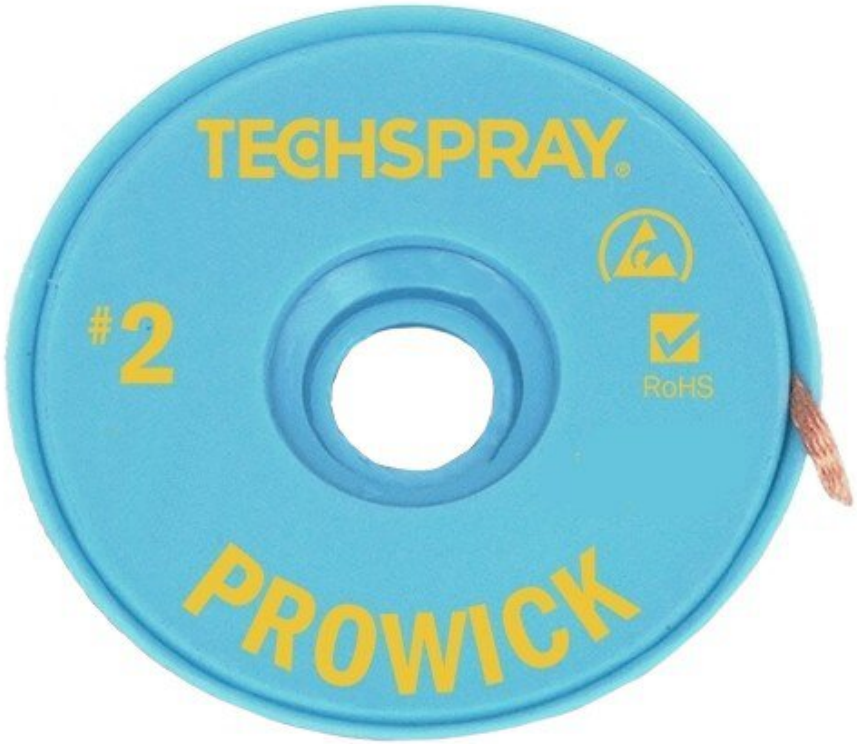

For fast and efficient cleaning, the 1809-5F desoldering braid with a width of 1.4 mm, wetted with Rosin flux, is ideal for the production/repair of printed circuit boards in large quantities. The desoldering braid is a flux wetted copper braid that is used to remove solder so that components can be replaced and excess solder removed. The soldering iron is placed on the braid - as soon as both have been brought to the correct temperature, the flux is activated. The capillary action of the braid draws the solder up the wire. Techspray desoldering braids are available on ESD-safe spools and are therefore suitable for use with ESD-sensitive components.

• Des soudures sur le rouleau de l'EDD
• Brin imprégné de flux de résine pour une absorption rapide de la soudure

Numéro d'article	**WL15055**

Modèle	1809-5F
Fabricant	TECHSPRAY
Numéro d'article du fabricant	1809-5F
Données du fabricant du GPSR	TECHSPRAY ITW Saffierlaan 5 NL-2132 Hoofddorp www.techsprayeu.com
Longueur	1500 mm
Largeur	1,4 mm
Unité de vente	1 rouleau
Unité de contenu	1 Rouleaux
Couleur	jaune
Normes	MIL-F-14256; NASA NHB 5300, 4 (34-1); NASA NPC 200-4; NASA SP5002; 1821: HP 8690-0588; 1823: HP 8690-0577; IPC Standard-J-STD-004
Conforme RoHS	oui
Conforme aux normes ESD	oui

Autres versions

Numéro d'article	Largeur	Longueur
WL15046	0,9 mm	3000 mm
WL15055	**1,4 mm**	**1500 mm**
WL15052	1,4 mm	3000 mm
WL15060	1,9 mm	1500 mm
WL15057	1,9 mm	3000 mm
WL15058	1,9 mm	30500 mm
WL15064	2,5 mm	1500 mm
WL15061	2,5 mm	3000 mm
WL15062	2,5 mm	30500 mm