


## Paire de pointes de pincette de la série TxP, conique, 0,4 x 19,1 mm

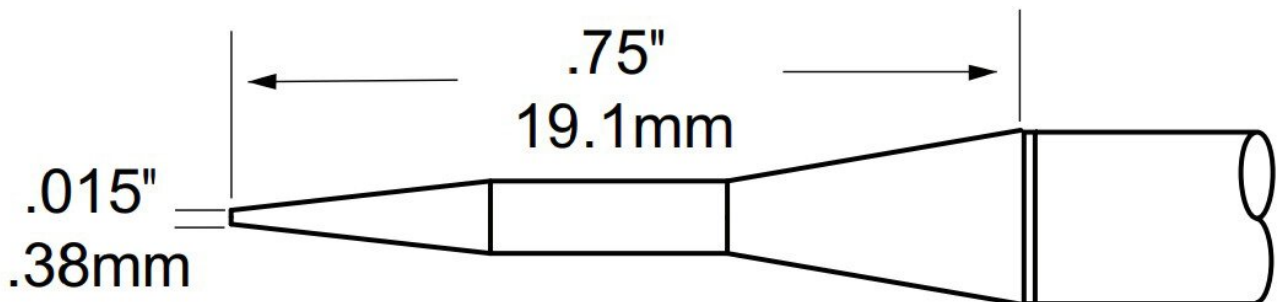

TxP-Tweezer Tip Cartridges are the standard tweezer tip range for the Metcal MFR-series soldering systems. TFP-Tweezer tips are nominally 390 °C. Metcal recommends the TFP-series for most applications. The TCP Tweezer tips are nominally 450 °C and recommended for high temperature and thermally demanding applications. Can be used with leaded and lead-free solder. The Metcal "SmartHeat®-Technology" adjusts power levels automatically based on the demand of the application.

- convient pour MFR-1100 et MFR-2200
- pour les applications sensibles à la température

|                               |                                                                                                          |
|-------------------------------|----------------------------------------------------------------------------------------------------------|
| Numéro d'article              | <b>WL27563</b>                                                                                           |
| Modèle                        | TTP-CNP1                                                                                                 |
| Fabricant                     | OKI                                                                                                      |
| Numéro d'article du fabricant | TTP-CNP1                                                                                                 |
| Données du fabricant du GPSR  | OK International Ltd<br>Eagle Close, Chandlers Ford<br>GB-SO53 4NF Hampshire<br>www.ok-international.com |
| Unité de vente                | 1 paire                                                                                                  |
| Unité de contenu              | 1 paire                                                                                                  |
| Batterie incluse              | non                                                                                                      |
| Série de produits             | Série TxP                                                                                                |
| Température (max.)            | 366 °C                                                                                                   |
| Série de conseils             | TxP                                                                                                      |
| Longueur de la pointe         | 19,1 mm                                                                                                  |
| Largeur de la pointe          | 0,4 mm                                                                                                   |

|                                |           |
|--------------------------------|-----------|
| Diamètre de la pointe à souder | 0,4 mm    |
| Forme de la pointe             | conique   |
| Alignement des pointes         | droit     |
| Température de la pointe       | 365 °C    |
| Pièce à main assortie          | MFR-H4-TW |
| Conforme aux normes ESD        | non       |

## Autres versions

| Numéro d'article | Température (max.) |
|------------------|--------------------|
| <b>WL27563</b>   | <b>366 °C</b>      |
| WL24754          | 421 °C             |
| WL27002          | 471 °C             |