
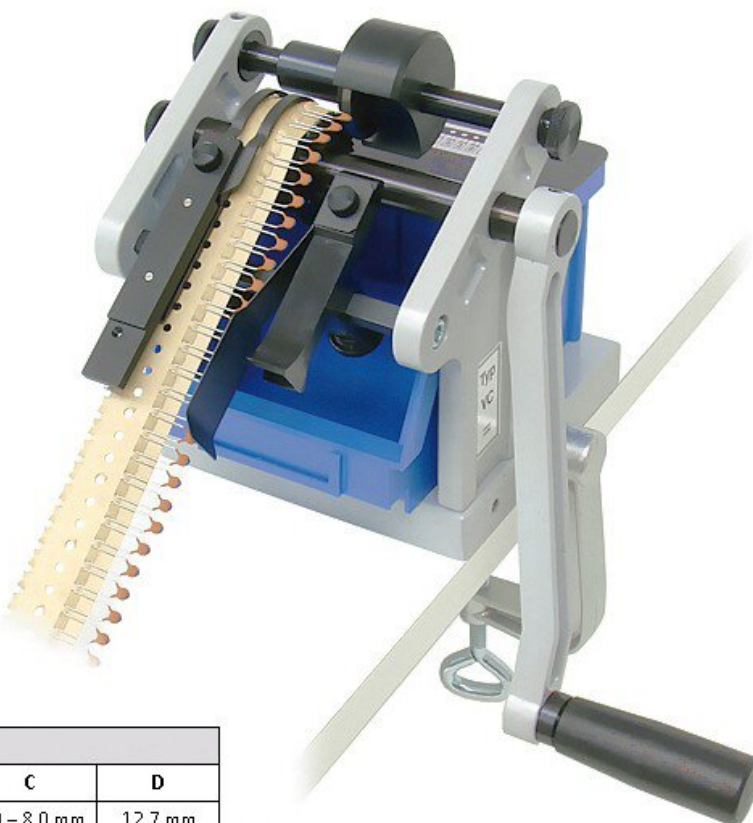


Frez 0,8 / promieniowy, rozstaw otworów 12,7 mm



Bearbeitungsmasse:				
Kopftyp	A	B	C	D
12,7	0,5 – 0,8 mm	max. 35 mm	1,0 – 8,0 mm	12,7 mm
15,0	0,5 – 0,8 mm	max. 35 mm	1,0 – 8,0 mm	15,0 mm

Cutting device for radially taped components

Operation via crank, up to 40,000/h

- Pitch 1/2" (12.7 mm)
- D wire = 0.5 - 0.8 mm

Numer artykułu.	WL15304
Model	VARIOCUT
Producent	SCHLEUNIGER
Dane producenta GPSR	Schleuniger GmbH Bierigutstrasse 9 CH-3608 Thun www.schleuniger.com
Jednostka sprzedaży	1 sztuka

Products for the electronic industry



Jednostka treści	1 sztuka
W zestawie bateria	nie

