
Kielich zabezpieczający, prostokątny, 12,0 x 23,0 mm

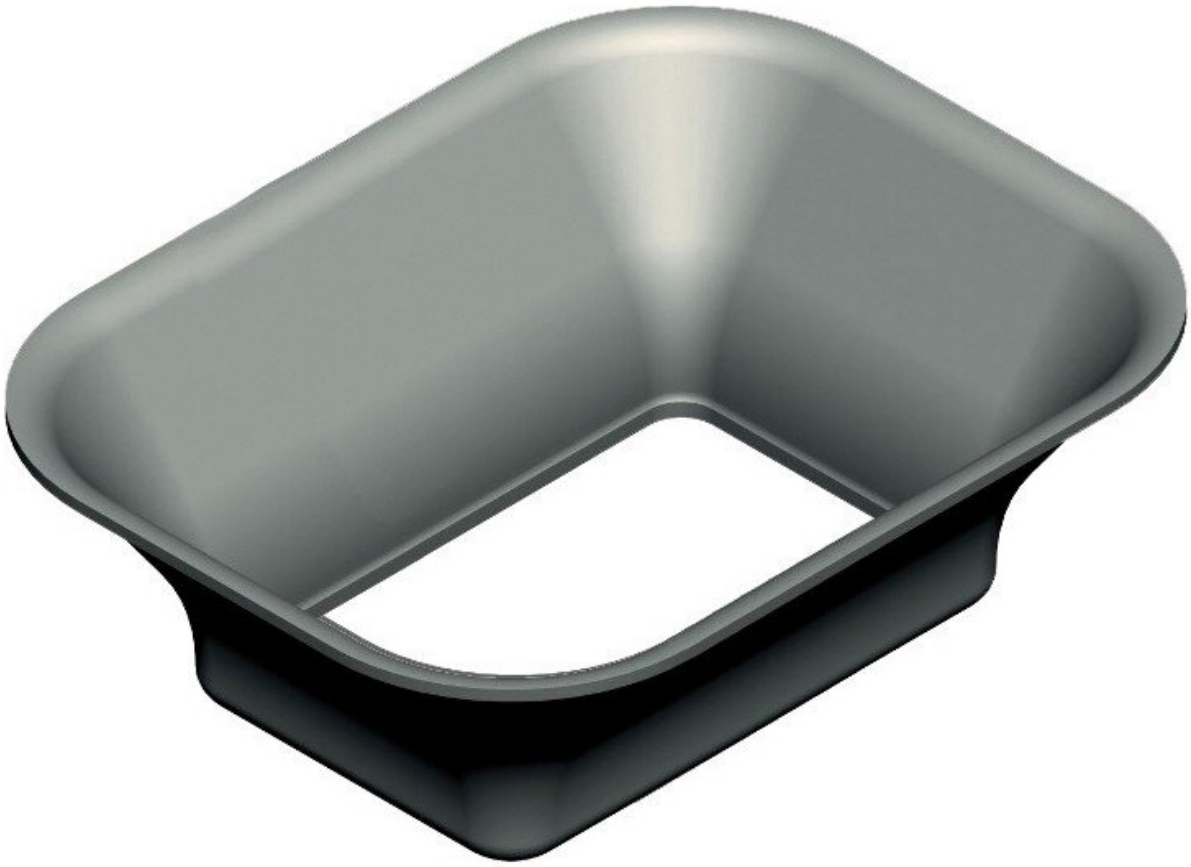

The rectangular protective cup measuring 12 x 23 mm is an indispensable accessory for hot air repair stations. It concentrates the heat precisely on the desired area and at the same time protects adjacent components from unwanted heat. For optimum results, the protective cup should be the right size for the component to be desoldered. Although it can be used without a tripod, the combination with a tripod enables clean and efficient removal of the component. Ideal for precise repair work.

- element prostokątny – bez statywu
- do stacji naprawczych na gorące powietrze
- chroni elementy znajdujące się obok
- koncentruje ciepło na żądanym obszarze
- Pojemnik ochronny powinien mieć rozmiar pasujący do elementu, który ma zostać odlutowany
- produktu można użyć z trójnożnym statywem, co pozwala precyzyjnie usunąć element

Numer artykułu.	WL23242
Model	0001249 / P1249
Producent	JBC
Numer artykułu producenta.	P1249
Dane producenta GPSR	JBC Soldering SL Ramón y Cajal 3 ES-08750 Molins De Rei www.jbctools.com
Długość z opakowaniem	80 mm
Szerokość z opakowaniem	40 mm
Wysokość z opakowaniem	35 mm
Jednostka sprzedaży	1 sztuka
Jednostka treści	1 sztuka
Długość (miska ochronna)	12 mm
Szerokość (miska ochronna)	23 mm
Kształt	prostokątny
Wymiary	12 x 23 mm
Zgodny z ESD	nie

Inne wersje

Numer artykułu.	Długość (miska ochronna) x Szerokość (miska ochronna)
WL23238	4,3 mm x 3 mm
WL23239	5,2 mm x 7,5 mm
WL23240	5,2 mm x 9,5 mm
WL23241	6,2 mm x 4,2 mm
WL13143	9 mm x 13 mm
WL13144	9,5 mm x 19 mm
WL13146	9,5 mm x 21 mm
WL13145	10,5 mm x 21 mm
WL13147	11 mm x 16 mm
WL13134	12 mm x 17 mm
WL23242	**12 mm x 23 mm**
WL23243	13 mm x 31,5 mm
WL13141	13,5 mm x 21,5 mm

WL23245	18 mm x 29 mm
WL23246	18,5 mm x 24 mm
WL23249	33 mm x 46 mm
WL23251	52,5 mm x 14 mm