


Suction arm system DN50 for table mounting, 2 joints, red, 445 mm

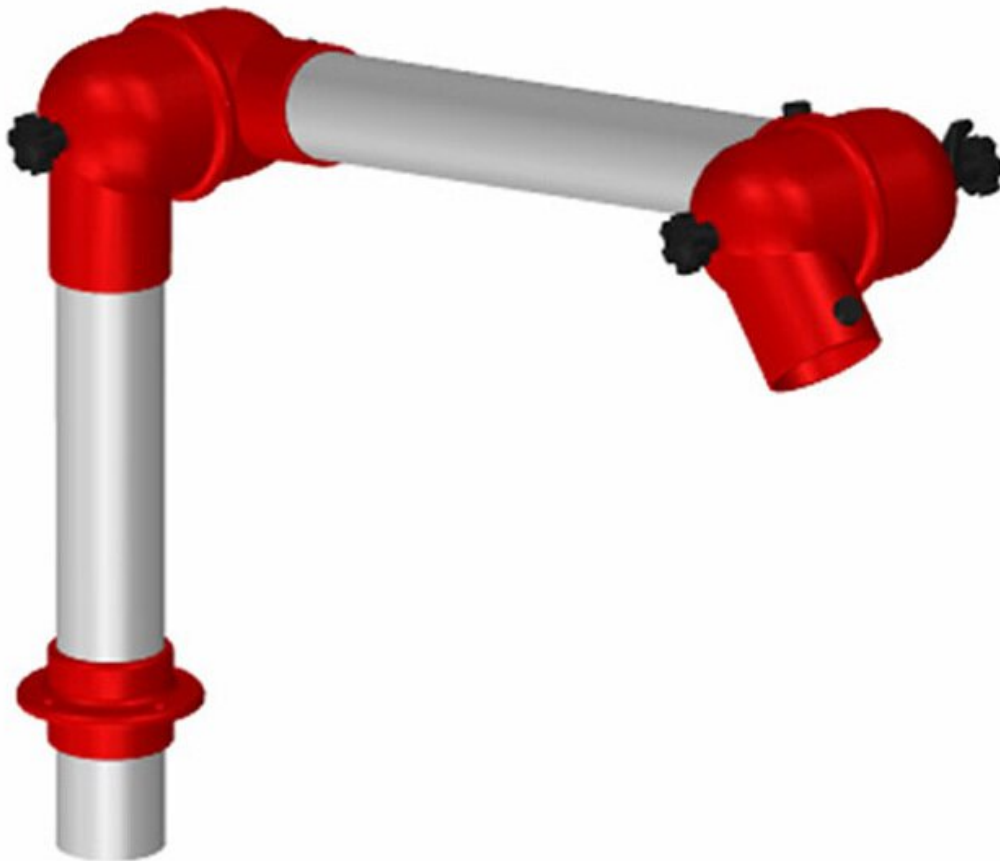

The Alsident 50 system has tubes with a diameter of 50 mm and is suitable for air volumes of 45 -85 m³/h. As a result, the system is ideally suited for use in industries with smaller detection tasks, such as the electronics industry, laboratories, laser technology or even for specialist rooms in schools.

- All components RoHS compliant
- Maintenance-free O-rings
- Integrated throttle valve which is in open position from the air flow to ensure maximum flow through the unit
- Threaded rods, springs and thumbscrews in acid-resistant stainless steel (AISI 316L)
- Acid-resistant POP® rivets for increased durability even when used in aggressive environments
- Protective grille (accessory) to prevent foreign bodies from being sucked in

Article no.	WL20600
Model	50-27-1-4
Manufacturer	ALSIDENT
Manufacturer article no.	50-27-1-4
GPSR manufacturer data	Alsident system A/S Finlandsvej 10 DK-8450 Hammel www.alsident.com
Sales unit	1 piece
Content unit	1 piece
Colour	red
Colour	red
Material	Anodised aluminium tubes - layer thickness 10 µ, polypropylene joints
Product series	Alsident System 50 AL
Number of joints	2
Reach	445 mm
Pipe diameter	50 mm
Air volume of the extraction arm	45 – 85 m ³ /h
Mounting type	table mounting
Joint colour	red
ESD compliant	no

Other versions

Article no.	Reach
WL20600	445 mm
WL15472	545 mm
WL20605	645 mm
WL20607	745 mm