


## Extraction arm system DN50 3 joints, 1380 mm, white - ceiling mounting

---

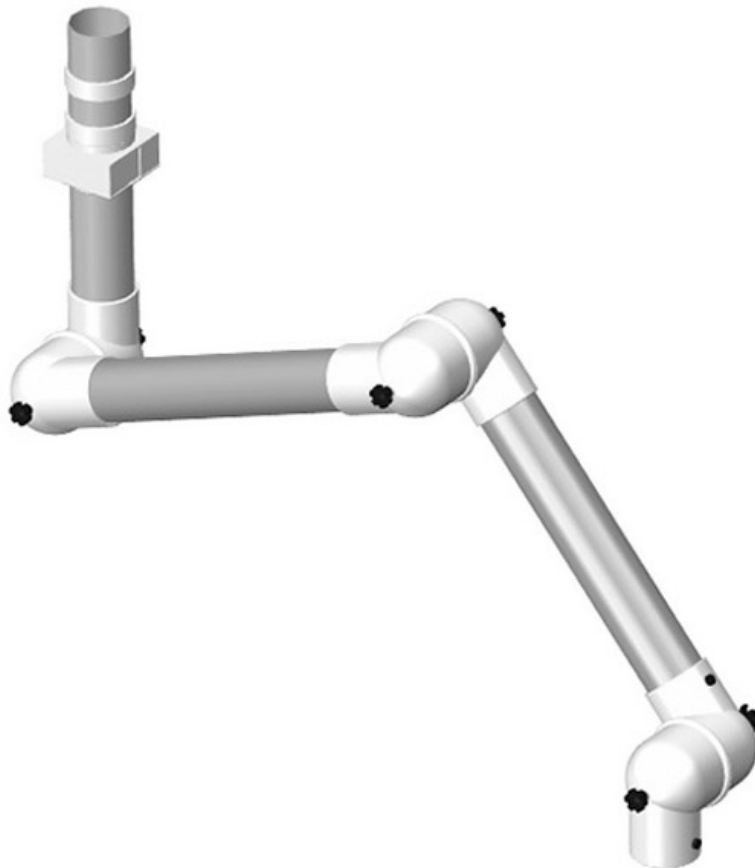

The Alsident 50 system has tubes with a diameter of 50 mm and is suitable for air volumes of 45 -85 m<sup>3</sup>/h. As a result, the system is ideally suited for use in industries with smaller detection tasks, such as the electronics industry, laboratories, laser technology or even for specialist rooms in schools.

- Maintenance-free O-rings Integrated throttle valve that is in open position from the air stream to ensure maximum flow rate
- Threaded rods, springs and thumbscrews in acid-resistant stainless steel (AISI 316L)
- Acid-resistant POP® rivets for increased durability even when used in aggressive environments
- Protective grille (accessory) to prevent foreign bodies from being sucked in
- All components RoHS compliant

item number	WL20643
model	50-8747-3-5
manufacturer	ALSIDENT
manufacturer item number	50-8747-3-5
order unit	1 piece
content unit	1 piece
colour	whitely
Colour	white
material	Anodised aluminium tubes - layer thickness 10 µ, polypropylene joints
product series	Alsident System 50 AL
number of joints	3
range	1380 mm
diameter of tube	50 mm
air volume extraction arm	45 – 85 m <sup>3</sup> /h
assembling	ceiling mounting
joint colour	white
ESD safe	no