


ESD adhesive tape with ESD warning symbol, transparent, 48mm, 36m

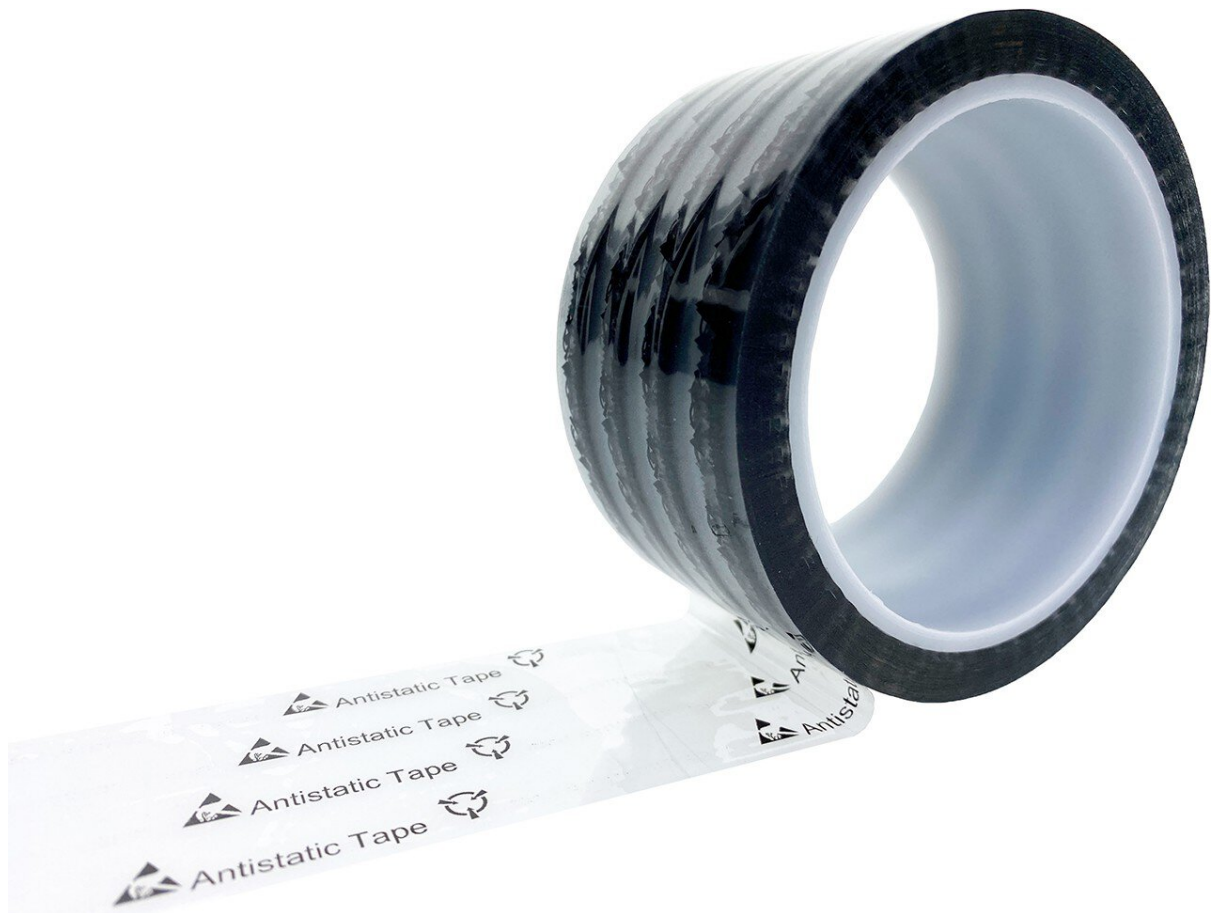

The ESD adhesive tape from Safeguard is specially designed for the ESD zone and helps to prevent damages caused by electrostatic discharges to sensitive electronic components. The ESD warning symbol on the tape makes it immediately recognizable as an ESD protection product. With a length of 36 meters and a diameter of 76 mm, it fits perfectly on dispensers. The typical leakage resistance is between 10^5 - 10^9 ohms. This ESD tape is easy to apply and remove without leaving any residue. It is ideal for clean work areas and provides reliable electrostatic discharge protection. Safeguard's transparent ESD Tape is available in various widths.

- ESD adhesive tape, transparent
- with ESD warning symbol
- Surface resistance $10^5 \sim 10^9$ Ohm
- W = 48 mm, L = 36 m, for dispenser D = 76 mm
- Thickness: 0.06 mm $\pm$ 0.002MM

- Pull-off force (180 degrees): 600 G $\pm$ 20G
- Tensile strength LD: 42 (unit: n/25mm)
- Elongation: 159%
- Layer thickness: 38 μ m
- Adhesive thickness: 21 μ m
- Frictional voltage: 80V
- Resistance on the film side: 10⁷
- Resistance of the adhesive side of the tape: 10⁹

Item no.	WL47282
Model	SG-KB-TP
Manufacturer	SAFEGUARD
Manufacturer article no.	SG-KB-TP-48X36M
GPSR manufacturer data	Weidinger GmbH Hertha-Sponer-Str. 1a DE-82216 Gernlinden
Length	36000 mm
Width	48 mm
Sales unit	1 rolls
Content unit	1 rolls
Manufacturer colour information	transparent
Colour	metalised, transparent
Diameter	76 mm
Incl. battery	no
Typical leakage resistance	10 ⁷ - 10 ⁹ Ohm
ESD certification according to IEC 61340-5-1:2016	yes
ESD compliant	yes

Other versions

Item no.	Width
WL47279	12 mm
WL47280	18 mm
WL47281	24 mm
WL47282	48 mm