


SET Replacement jaws 50 mm for clipping on (5 pairs)

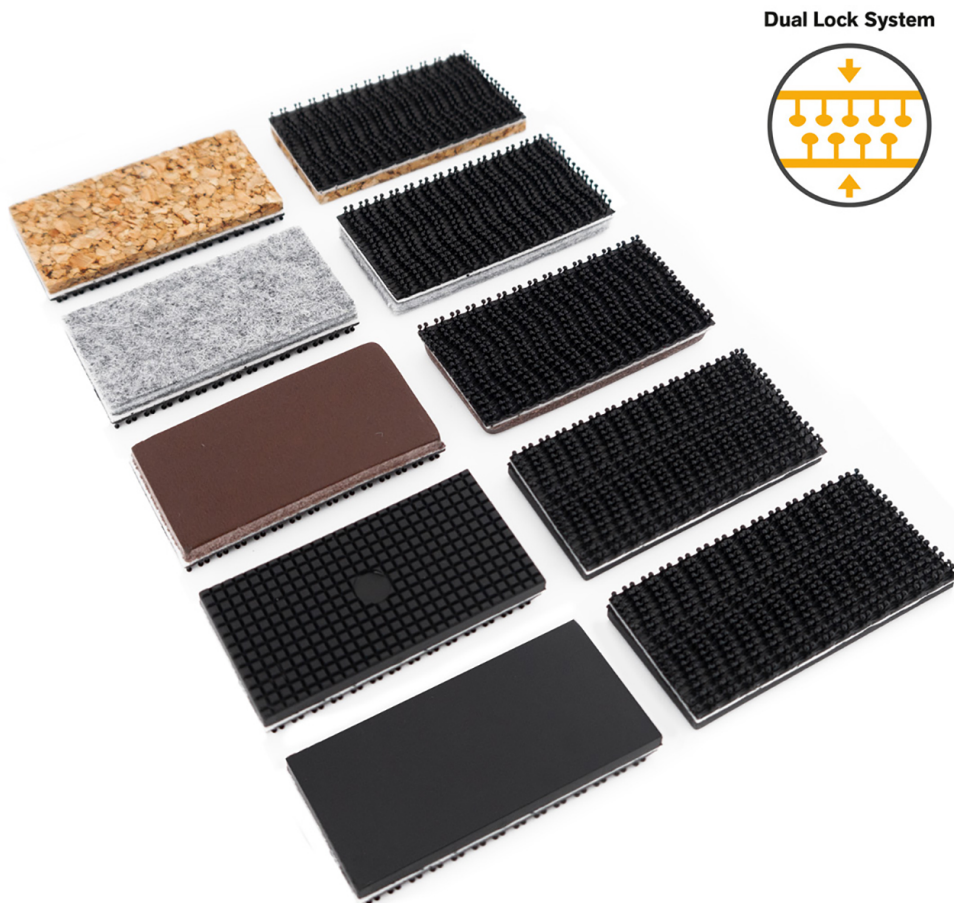

The 50 mm jaws are made of felt, cork, plastic or leather with pressure lock and are designed to be attached to our ball joint vice 9-205-K.

The high-quality coating protects sensitive parts from scratches or damage. The ribbed side of the plastic provides a strong hold and good fixation of the parts and components to be machined. The pressure fastener is a type of Velcro tape with very stable and precise fixation. By simply pressing together - whereby small mushroom heads interlock - a very firm but removable connection is created. The pressure fastener can be crossed, staggered or overlapped. It provides a permanent mechanical fastening that will not loosen even with sustained jarring movements.

In contrast to a Velcro fastener, this quickly releasable connection is characterised by high shear strength. The self-adhesive backing adheres immediately with excellent final adhesive strength, even at high temperatures and on rough surfaces. FELT = Synthetic fleece fibres (grey) very robust long-lasting stable felt, lint-free. CORK OAK = very elastic, poorly combustible, natural and sustainable raw material. LEDER = hard-wearing, optimal wear behaviour, water drop resistance. PLASTIC (PP) corrugated and smooth surface.

PRESSURE SEALING = over 1,000 sealing cycles, material polyolefin, colour black, adhesive acrylate (VHB), temperature resistance continuous -30 to +70°C (short term +95°C), foodstuff resistant, moisture resistant, UV resistant, ageing resistant, chemical and plasticizer resistant, dynamic tensile strength approx. 21 N/cm², max. static tensile strength and shear strength approx. 160 g/cm², flammability test according to F.A.R. 25.853 (b-2) passed. Storage unprocessed 12 months shelf life at 20°C storage temperature and 50% relative humidity. Dual Lock is a patented pressure lock system from 3M (ISO 9002 certified).

- Contents: Article listing see below
- quick change vice jaws suitable for 9-205-K with jaw width 50 mm
- flexible pressure lock, connection for re-release
- firm, stable, precise and accurate connection
- FELT / CORK / LEATHER / PLASTIC smooth and ribbed
- for clamping parts with scratch-sensitive surfaces
- including KLETT Dual Lock pressure lock, self-adhesive 50x25mm (VE10)
- further jaws search field entry 9-900
- approx. dimensions 50 x 25 mm
- weight 49 g

item number	WL63656
manufacturer	BERNSTEIN
manufacturer item number	9-900-K50-SET
scope of supply	SET spare jaws 50 mm for clipping on (5 pairs) consisting of: 9-900-K50-FILZ Replacement jaws for velcro felt/velcro 50 mm (pair) 9-900-K50-KORK Spare jaws for velcro cork/velcro 50 mm (pair) 9-900-K50-LEDER Spare jaws for tacking leather/velcro 50 mm (pair) 9-900-K50-KST Spare jaws for clipping on plastic corrugated/velcro 50 mm (pair) 9-900-K50-KSTG Spare jaws for clipping on plastic smooth/velcro 50 mm (pair) KLETT-K050x25 Dual Lock pressure lock, self-adhesive 50x25mm (VE10)
order unit	1 set
content unit	1 set
ESD safe	no