
Punta di saldatura serie SxV a scalpello 5 x 11,7 mm

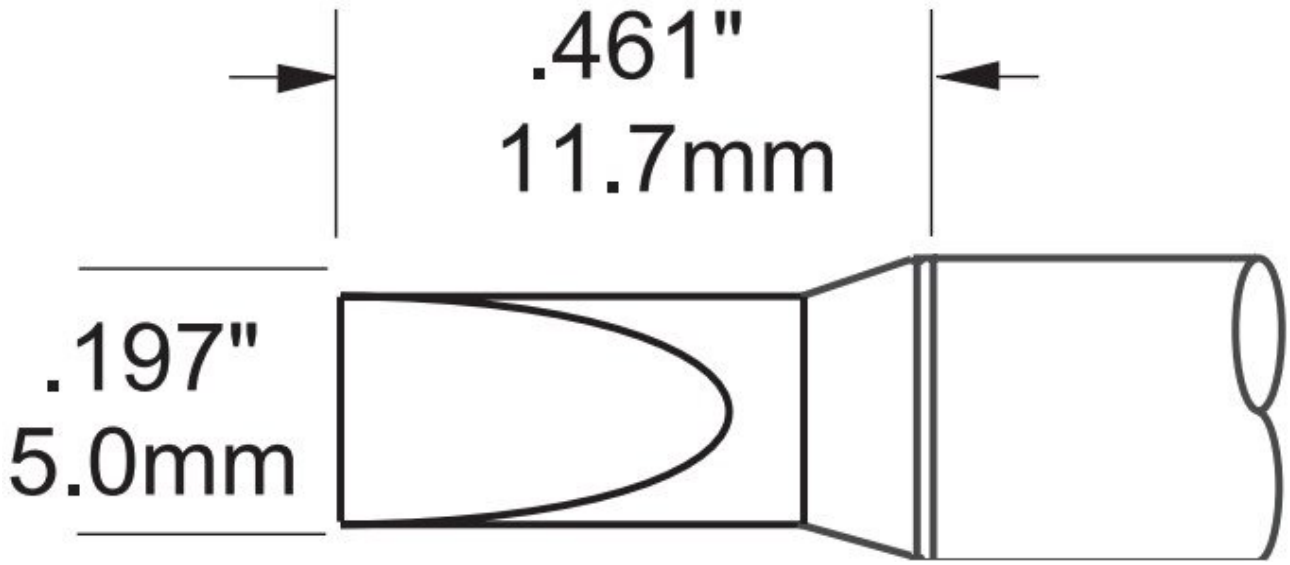

SxV-Solder Tips are the standard soldering tip range for the Metcal PS-900/MFR1100, MFR-2210, MFR-1351-series soldering systems. The temperature/series is designated by the first digit following the dash in the part number. The SFV-series are nominally 390 ˚C. Metcal recommends the SFV-series for the majority of applications. However, thefamily also offer a higher temperature serie designated SCV, nominally 450 ˚C, for high temperature and thermally demanding applications. STV-series are nominally 330 ˚C for light load application. Can be used with leaded and lead-free solder The Metcal "SmartHeat®-Technology" automatically adjusts power levels during each soldering operation.

- per applicazioni sensibili alla temperatura
- geometria originale facilmente accessibile
- adatto per i manipoli dei sistemi PS e MFR

Articolo n.	**WL27832**
Modello	STV-CH50AR
Produttore	OKI
Codice articolo del produttore	STV-CH50AR
Dati del produttore GPSR	OK International Ltd Eagle Close, Chandlers Ford GB-SO53 4NF Hampshire www.ok-international.com

Unità di vendita	1 Pezzo
Unità di contenuto	1 Pezzo
Serie di prodotti	Serie SxV
Temperatura (max.)	366 °C
Serie di suggerimenti	SxV
Lunghezza della punta	11,7 mm
Larghezza della punta	5 mm
Forma della punta	scalpello
Allineamento della punta	Dritta
Temperatura della punta	365 °C
Conforme alle ESD	No

Altre versioni

Articolo n.	Temperatura (max.)
WL27832	**366 °C**
WL24766	421 °C
WL26531	471 °C