
Punta di rilavorazione Serie RxP Slot 3,48 x 1,63 mm

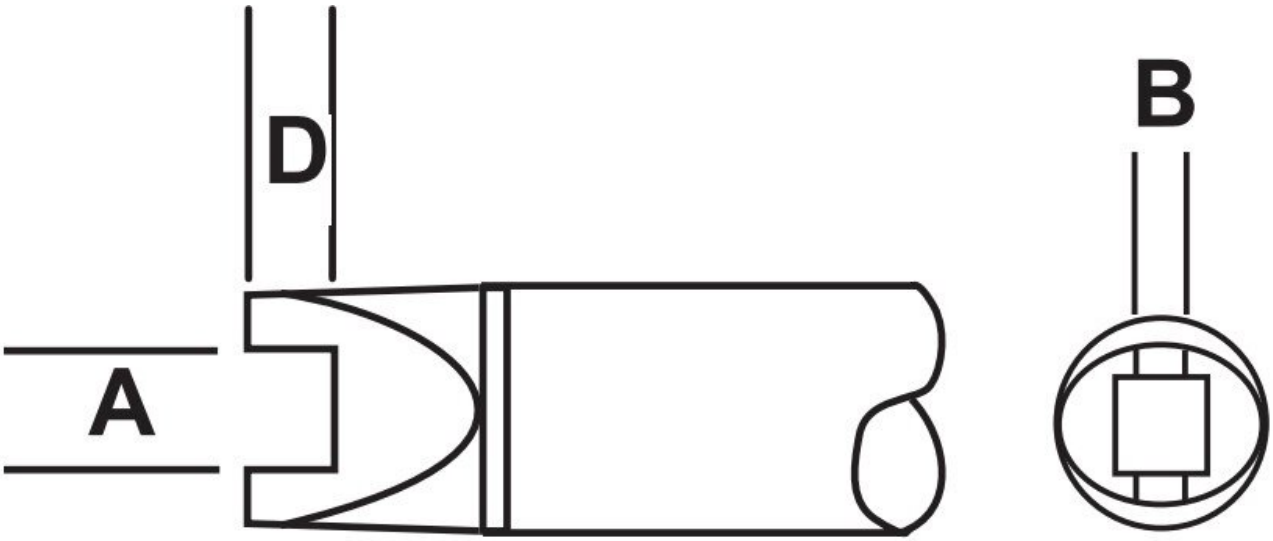

RxP-Blade/Quad Solder Tip Cartridges are the rework tips for the Metcal MFR-series soldering systems. The second letter in the part number designates the temperature series. RFP-Cartridges are nominally 390 ˚C. Metcal recommends the RFP temperature series for most applications. However, there is a higher temperature range designated RCP, nominally 450 ˚C, for high temperature and thermally demanding applications. Can be used with leaded and lead-free solder. The Metcal SmartHeat®-Technology“ will adjust the power levels during soldering to suit the application.

- adatto per la ceramica e per applicazioni con elevati requisiti termici
- adatto per le serie MFR-1100 e MFR-220
- Dimensioni delle scanalature: 3,48 x 1,63 mm

Articolo n.	**WL28016**
Modello	RCP-SL2
Produttore	OKI
Codice articolo del produttore	RCP-SL2
Dati del produttore GPSR	OK International Ltd Eagle Close, Chandlers Ford GB-SO53 4NF Hampshire www.ok-international.com
Unità di vendita	1 Pezzo
Unità di contenuto	1 Pezzo
Larghezza interna	3,48 mm

Serie di prodotti	Serie RxP
Serie di suggerimenti	RxP
Progettazione SMT	Chip 1206
Forma della punta	fessura
Allineamento della punta	Dritta
Manipolo corrispondente	MFR-H1-SC
Conforme alle ESD	No

Altre versioni

Articolo n.	Progettazione SMT
WL28015	Chip 0805
WL28016	**Chip 1206**